
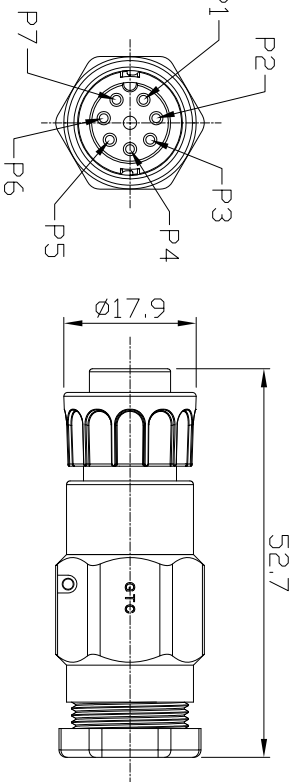


- Notes: (Unless Otherwise Specified)
1. Waterproof Rate: IP67.
  2. Recommend Cover Torque: 6~7 Kgf-cm.
  3. Recommend Gland Nut Torque: 9~10 Kgf-cm.
  4. Cable Diameter: 5.0mm To 6.0mm.
  5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Lucas 10/23/12	Roy 10/23/12	Roy 10/23/12

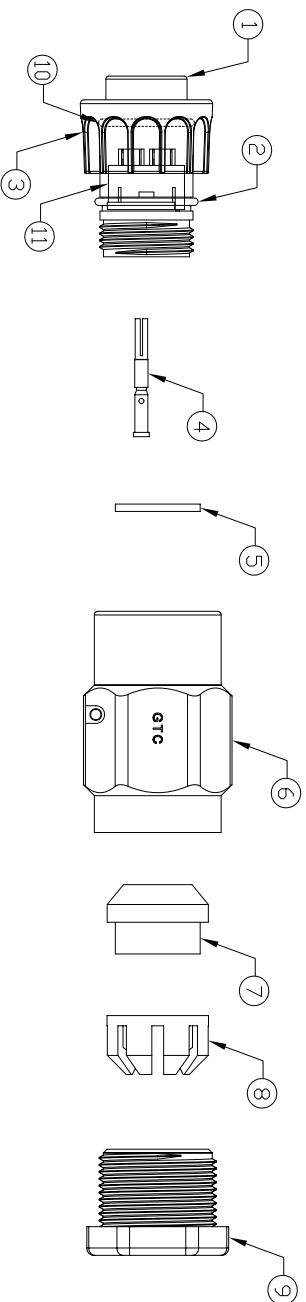


Pin Assignment

Item	Part Name	Material / Finish	Qty
11	Base	Thermoplastic Color: Black	1
10	D-Ring	Silicone Color: Red	1
9	Gland Nut	Thermoplastic Color: Black	1
8	Cage	Thermoplastic Color: White	1
7	Gland	Silicone Color: Green	1
6	Cover	Thermoplastic Color: Black	1
5	Gasket	Silicone Color: Black	1
4	Contacts	Copper Alloy Finish: Au Plated	7
3	Lock Nut	Thermoplastic Color: Black	1
2	D-Ring	Silicone Color: Red	1
1	Housing	Thermoplastic Color: Black	1

C2 5A 7P Field Installable Cable End Female Crimp Lock

THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET
1	B	1:1	Edwin 12/29/09	Roy 12/29/09	Roy 12/29/09	XX ± 0.5 XXX ± 0.2	mm	1/1

DRAWING NUMBER	REV.
GT152264-22070	A0



GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:  
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD. THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE AND NOT TO REPRODUCE, PUBLISH IT IN WHOLE OR PART (S) ALL RIGHTS RESERVED