

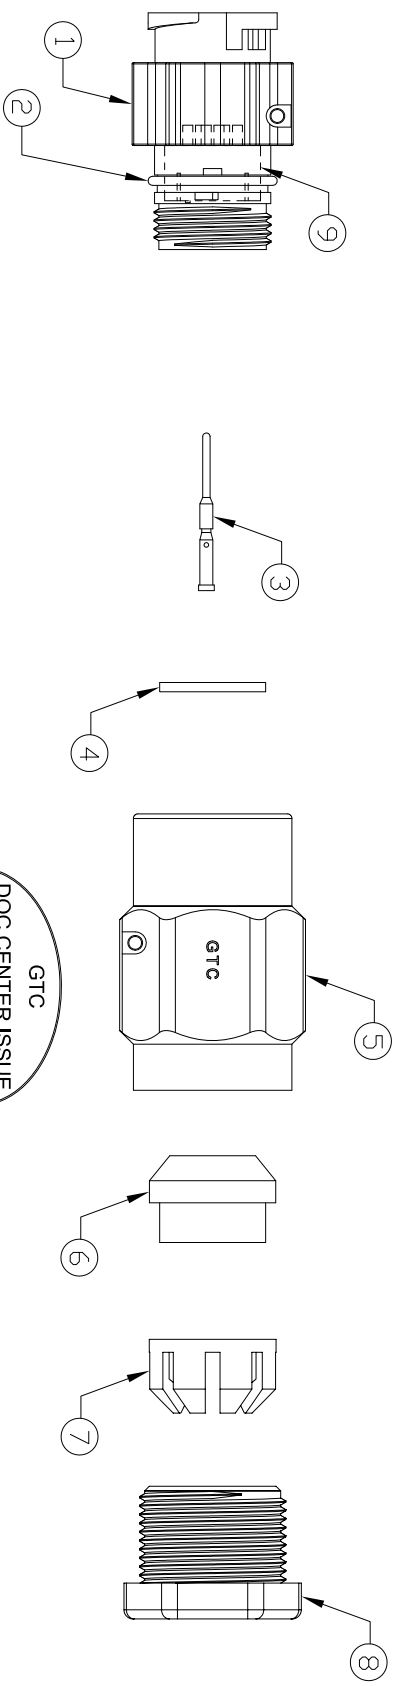


- Notes: (Unless Otherwise Specified)
1. Waterproof Rate: IP67.
 2. Suitable Cable OD=5.0mm To 6.0mm.
 3. Recommend Housing Torque: 6~7 Kgf-cm.
 4. Recommend Gland Nut Torque: 9~10 Kgf-cm.
 5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 04/17/12	Lucas 04/17/12	Roy 04/17/12

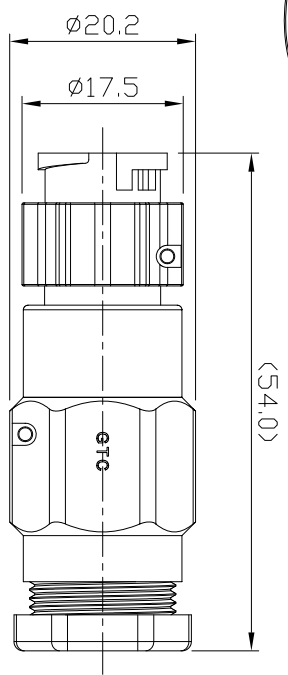

GTC
DOC.CENTER.ISSUE
APR.17.2012
ONLY FOR
RELEASE

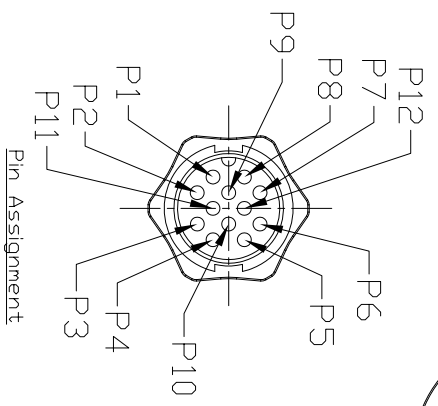

Item	Part Name	Material / Finish	Qty
9	Base	Thermoplastic Color: Black	1
8	Gland Nut	Thermoplastic Color: Black	1
7	Gage	Thermoplastic Color: White	1
6	Gland	Silicone Color: Green Thermoplastic Color: Black	1
5	Cover	Thermoplastic Color: Black	1
4	Gasket	Silicone Color: Black	1
3	Contacts	Copper Alloy Finish: Au Plated	12
2	D-Ring	Silicone Color: Red	1
1	Housing	Thermoplastic Color: Black	1

TITLE C2 2A 12P Field Installable Cable To Cable Male Crimp Lock

DRAWING NUMBER GT152294-21120 REV. A0

GT Contact CO.,LTD

THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET
1	B	N/A	Joyce 04/17/12	Lucas 04/17/12	Roy 04/17/12	XX ± 0.5 XXX ANGLES ± 1°	mm	1/1

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE AND NOT TO REPRODUCE, PUBLISH IT IN WHOLE OR PART (BY) ALL RIGHTS RESERVED