




Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Hank 10/19/20	Lucas 10/19/20	Ray 10/19/20



Conn.1

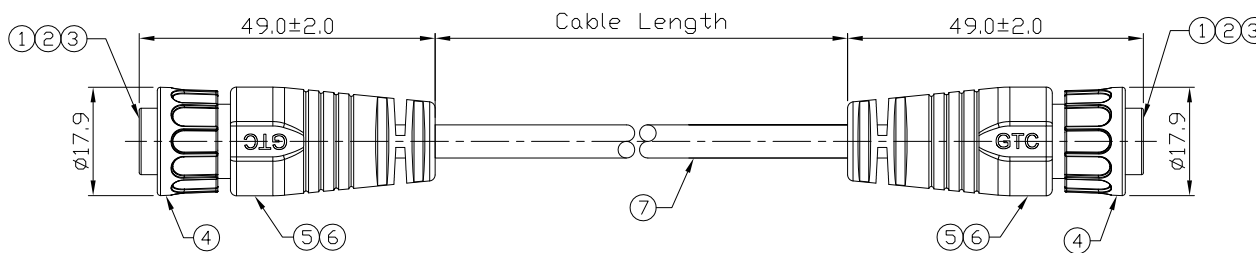

Conn.2

Conn.1		Conn.2	
1	Black	1	
2	Brown	2	
3	Red	3	
4	Orange	4	
5	Yellow	5	
6	Green	6	
7	Blue	7	
8	Violet	8	
9	Gray	9	
10	White	10	
11	Pink	11	
12	Light Green	12	

Wiring Diagram

GTC
DOC.CENTER.ISSUE
OCT.19.2020
ONLY FOR
RELEASE

GT1522A4-21121-10	10000mm	+500
GT1522A4-21121-09	9000mm	+450
GT1522A4-21121-08	8000mm	+400
GT1522A4-21121-07	7000mm	+150
GT1522A4-21121-06	6000mm	+150
GT1522A4-21121-05	5000mm	+150
GT1522A4-21121-04	4000mm	+150
GT1522A4-21121-03	3000mm	+100
GT1522A4-21121-02	2000mm	+100
GT1522A4-21121-01	1000mm	+50
GT1522A4-21121-Z9	900mm	+50
GT1522A4-21121-Z8	800mm	+50
GT1522A4-21121-Z7	700mm	+50
GT1522A4-21121-Z6	600mm	+50
GT1522A4-21121-Z5	500mm	+50
GT1522A4-21121-Z4	400mm	+50
GT1522A4-21121-Z3	300mm	+25
GT1522A4-21121-Z2	200mm	+25
GT1522A4-21121-Z1	100mm	+25
Part No.	Cable Length	Tol.

Item	Part Name	Material / Finish	Q'ty
7	Cable	UL2464 26AWG*12C+D+AL/My (UV) DD=6.0mm, Color:Black	2
6	Over Mold	PVC Color: Black	2
5	Inner Mold	Thermoplastic Color: White or Black	2
4	Lock Nut	Thermoplastic Color: Black	2
3	O-Ring	Silicone Color: Red	2
2	Contacts	Copper Alloy Finish: Au Plated	24
1	Housing	Thermoplastic Color: Black	2

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (ii) NOT TO REPRODUCE OR COPY IT
 (iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (iv) ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER			REV.
C2 2A 12P Cable End Twin-head Female Lock With Cable						GT1522A4-21121-XX			A0
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET	
	B	1:1	Hank 10/19/20	Lucas 10/19/20	Ray 10/19/20	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm 1/1	