

1


2

3

4

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 02/03/16	Lucas 02/03/16	Ray 02/03/16


Notes: (Unless Otherwise Specified)  
 1. Waterproof Rate: IP67.  
 2. RoHS Compliant.

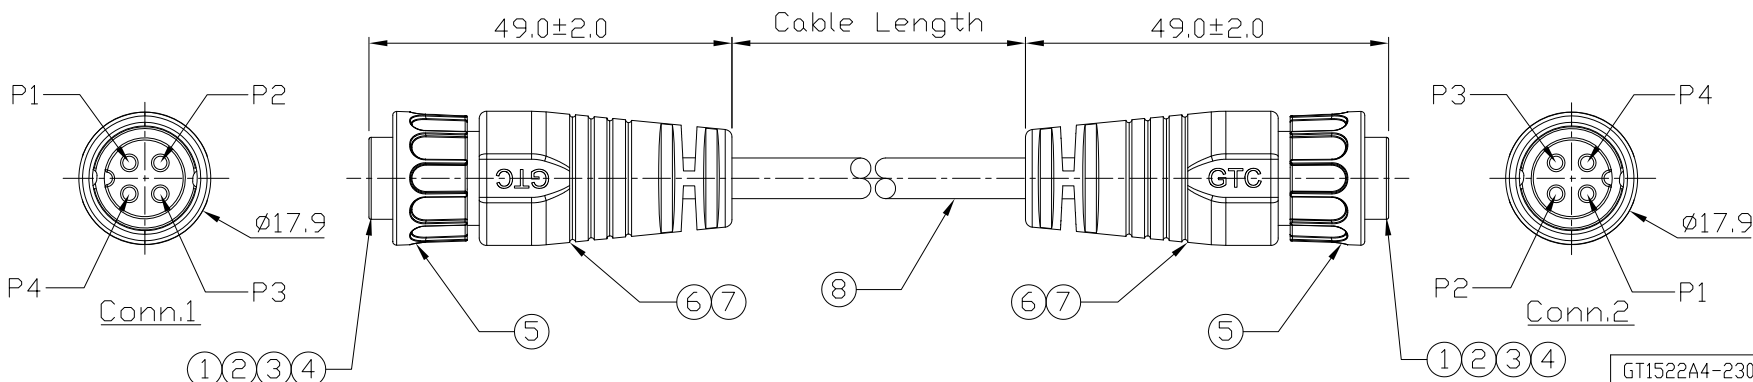

GT1522A4-23041-10	10000 mm	±500
GT1522A4-23041-09	9000 mm	±450
GT1522A4-23041-08	8000 mm	±400
GT1522A4-23041-07	7000 mm	±150
GT1522A4-23041-06	6000 mm	±150
GT1522A4-23041-05	5000 mm	±150
GT1522A4-23041-04	4000 mm	±150
GT1522A4-23041-03	3000 mm	±150
GT1522A4-23041-02	2000 mm	±100
GT1522A4-23041-01	1000 mm	±50
GT1522A4-23041-Z9	900 mm	±40
GT1522A4-23041-Z8	800 mm	±40
GT1522A4-23041-Z7	700 mm	±40
GT1522A4-23041-Z6	600 mm	±40
GT1522A4-23041-Z5	500 mm	±40
GT1522A4-23041-Z4	400 mm	±20
GT1522A4-23041-Z3	300 mm	±20
GT1522A4-23041-Z2	200 mm	±10

8	Cable	UL2464 16AWG*4C, OD=7.0mm Color: Black	1
7	Over Mold	PVC Color: Black	2
6	Inner Mold	Thermoplastic Color: White Or Black	2
5	Lock Nut	Thermoplastic Color: Black	2
4	Base	Thermoplastic Color: Black	2
3	O-Ring	Silicone Color: Red	2
2	Contacts	Copper Alloy Finish: Au Plated	8
1	Housing	Thermoplastic Color: Black	2
Item	Part Name	Material/Finish	Q'ty

GTC  
 DOC.CENTER.ISSUE  
 FEB.03.2016  
 ONLY FOR  
 RELEASE

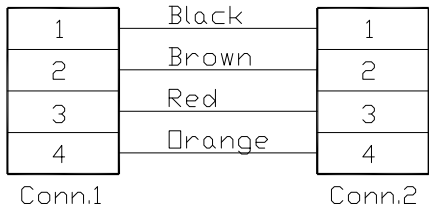

Wiring Diagram

Part No.	Cable Length	Tol.
----------	--------------	------

GT Contact CO.,LTD  
 NOTICE OF PROPRIETARY PROPERTY:  
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
 (A) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
 (B) NOT TO REPRODUCE OR COPY IT  
 (C) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
 (D) ALL RIGHTS RESERVED

TITLE C2 10A 4P Cable End Twin-head Female Lock						DRAWING NUMBER GT1522A4-23041-XX			REV. A0	
THIRD ANGLE PROJECTION		SIZE B	SCALE 1:1	DRAW / DATE Joyce 02/03/16	CHECK / DATE Lucas 02/03/16	APPROVE / DATE Ray 02/03/16	TOLERANCES X.X ± 0.5 X.XXX ± 0.05 X.XX ± 0.2 ANGLES ± 1°		UNIT mm	SHEET 1/1

1

2

3

4