

Notes: (Unless Otherwise Specified)



1. Waterproof Rate : IP67.
2. RoHS Compliant.

| REV | ECN# | DESCRIPTION OF REVISION | DRAW BY DATE      | CHECK BY DATE     | APPROVE BY DATE |
|-----|------|-------------------------|-------------------|-------------------|-----------------|
| 01  |      |                         | Lucas<br>05/30/19 | Lucas<br>05/30/19 | Ray<br>05/30/19 |

|    |        |    |
|----|--------|----|
| 1  | Brown  | 1  |
| 2  | Blue   | 2  |
| 3  | White  | 3  |
| 4  | Green  | 4  |
| 5  | Yellow | 5  |
| 6  | Gray   | 6  |
| 7  | Violet | 7  |
| 8  | Red    | 8  |
| 9  | Black  | 9  |
| 10 | Orange | 10 |

Conn.1                      Conn.2

Wiring Diagram

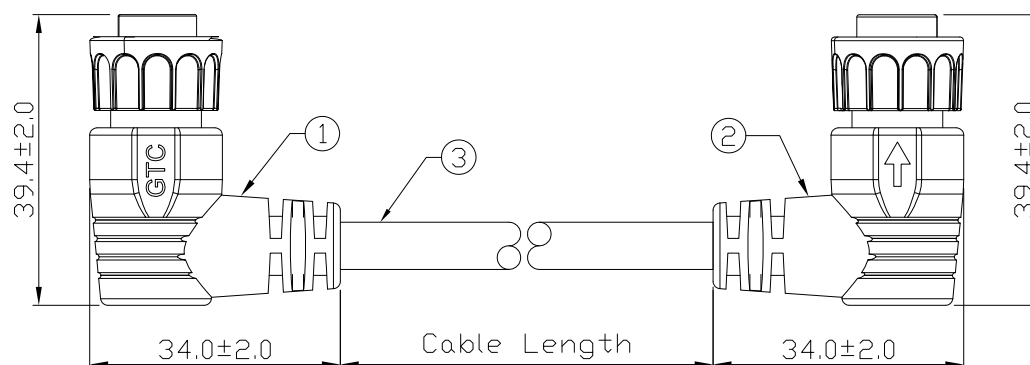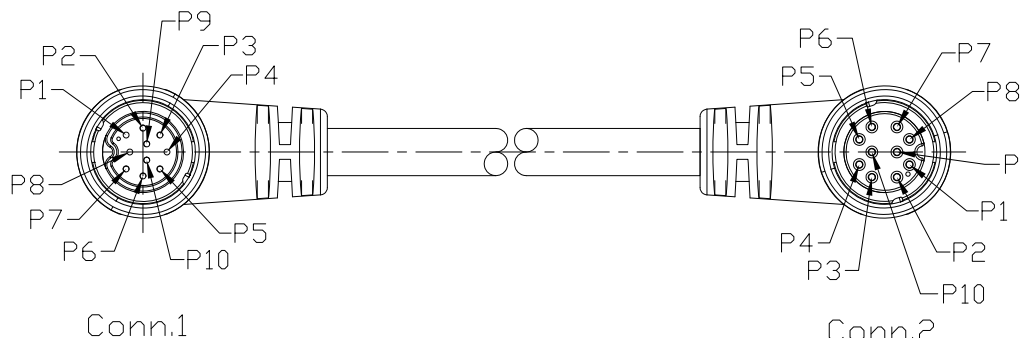

|                   |              |      |
|-------------------|--------------|------|
| GT1522D5-21101-10 | 10000 mm     | +500 |
| GT1522D5-21101-09 | 9000 mm      | +450 |
| GT1522D5-21101-08 | 8000 mm      | +400 |
| GT1522D5-21101-07 | 7000 mm      | +150 |
| GT1522D5-21101-06 | 6000 mm      | +150 |
| GT1522D5-21101-05 | 5000 mm      | +150 |
| GT1522D5-21101-04 | 4000 mm      | +150 |
| GT1522D5-21101-03 | 3000 mm      | +100 |
| GT1522D5-21101-02 | 2000 mm      | +100 |
| GT1522D5-21101-01 | 1000 mm      | +50  |
| GT1522D5-21101-Z9 | 900 mm       | +50  |
| GT1522D5-21101-Z8 | 800 mm       | +50  |
| GT1522D5-21101-Z7 | 700 mm       | +50  |
| GT1522D5-21101-Z6 | 600 mm       | +50  |
| GT1522D5-21101-Z5 | 500 mm       | +50  |
| GT1522D5-21101-Z4 | 400 mm       | +50  |
| GT1522D5-21101-Z3 | 300 mm       | +25  |
| GT1522D5-21101-Z2 | 200 mm       | +25  |
| GT1522D5-21101-Z1 | 100 mm       | +25  |
| Part No.          | Cable Length | Tol. |

| 3    | Cable                               | UL2464 26AWG*10C+D+Al/My<br>OD=6.0mm, Color:Black | 1   |
|------|-------------------------------------|---|-----|
| 2    | C2 2A 10P Cable End 90° Female Lock | GT Contact<br>P/N: GT152225-21101-XX              | 1   |
| 1    | C2 2A 10P Cable End 90° Male Lock   | GT Contact<br>P/N: GT152235-21101-XX              | 1   |
| Item | Part Name                           | Material / Finish                                 | Qty |

| TITLE   |      |       |                |                |                | DRAWING NUMBER          |                             |      | REV.  |
|---|------|-------|----------------|----------------|----------------|-------------------------|-----------------------------|------|-------|
| C2 2A 10P Cable End 90° Male/Female Lock With Cable |      |       |                |                |                | GT1522D5-21101-XX       |                             |      | 01    |
|   | B    | 1:1   | Lucas 05/30/19 | Lucas 05/30/19 | Ray 05/30/19   | X.X ± 0.5<br>X.XX ± 0.2 | X.XXX ± 0.05<br>ANGLES ± 1° | mm   | 1/1   |
| THIRD ANGLE PROJECTION                              | SIZE | SCALE | DRAW / DATE    | CHECK / DATE   | APPROVE / DATE | TOLERANCES              |                             | UNIT | SHEET |

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:  
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
(ii) NOT TO REPRODUCE OR COPY IT  
(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
(iv) ALL RIGHTS RESERVED