



Notes: (Unless Otherwise Specified)
 1. Waterproof Rate : IP67.
 2. RoHS Compliance.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 05/10/11	Lucas 05/10/11	Roy 05/10/11

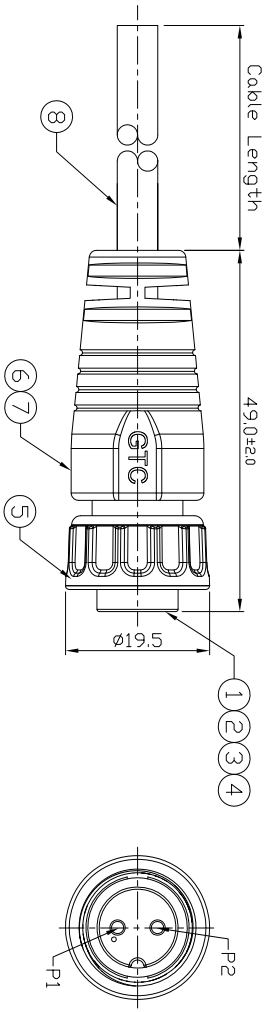

GTC
 DOC.CENTER.ISSUE
 MAY.10.2011
 ONLY FOR
 RELEASE



Wiring Diagram

Item	Part Name	Material / Finish	Qty
8	Cable	UL2464 24AWG*2C+D+AL/My (UV) DD=4.0mm, Color:Black	1
7	Over Mold	PVC Color: Black	1
6	Inner Mold	Thermal Plastic Color: White or Black	1
5	Screw Nut	Thermal Plastic Color: Black	1
4	O-Ring	Silicone Color: Red	1
3	Contacts	Copper Alloy Finish: Au Plated	2
2	Base	Thermal Plastic Color: Black	1
1	Housing	Thermal Plastic Color: Black	1

TITLE C2 5A 2P Cable End Female Screw

DD NOT SCALE DRAWINGS	B	1:1	Joyce 05/03/11	Lucas 05/03/11	Roy 05/03/11	XXX ± 0.5 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET

Part No.	Cable Length	Tol.
GT1S2324-22021-10	10000 mm	±500
GT1S2324-22021-09	9000 mm	±450
GT1S2324-22021-08	8000 mm	±400
GT1S2324-22021-07	7000 mm	±350
GT1S2324-22021-06	6000 mm	±300
GT1S2324-22021-05	5000 mm	±250
GT1S2324-22021-04	4000 mm	±200
GT1S2324-22021-03	3000 mm	±150
GT1S2324-22021-02	2000 mm	±100
GT1S2324-22021-01	1000 mm	±50
GT1S2324-22021-25	500 mm	±40

GT Contact CD,LTID

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO,LLTD THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE AND NOT TO REPRODUCE, PUBLISH IT IN WHOLE OR PART (W) ALL RIGHTS RESERVED