

1



2

3


4

- Notes: (Unless Otherwise Specified)
1. Waterproof Rate: IP67.
  2. Recommend Cable Diameter: 5.0 to 6.0 mm
  3. Recommend Cover Torque: 6.0 to 7.0 Kg-cm.
  4. Recommend Gland Nut Torque: 9.0 to 10.0 Kg-cm.
  5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Joyce 03/21/14	Lucas 03/21/14	Roy 03/21/14

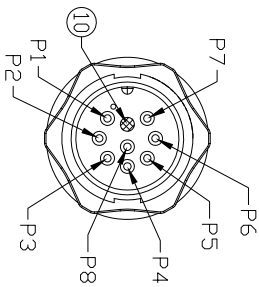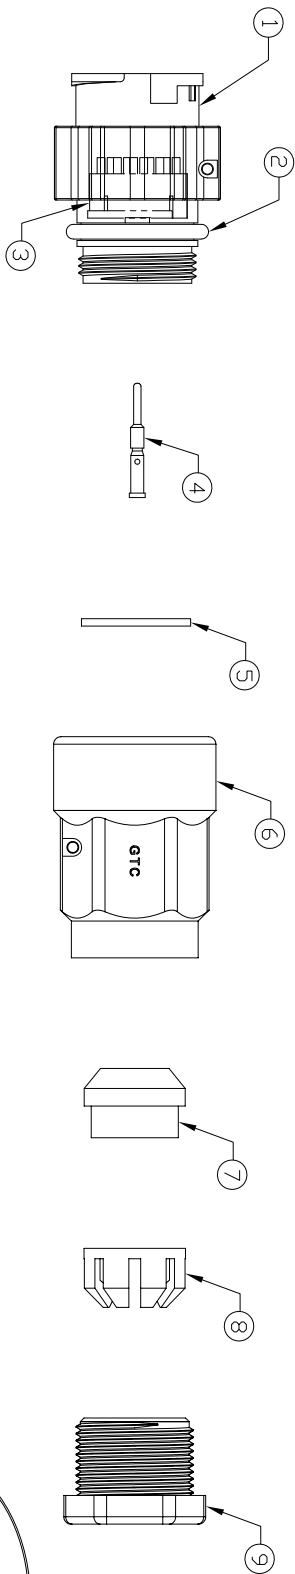

Pin Assignment

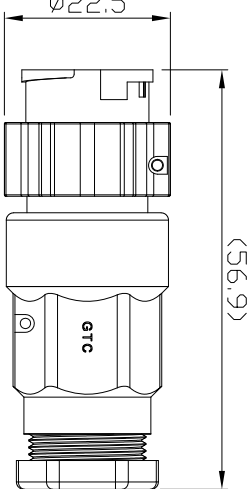

GTC  
R&D DEPT. ISSUE  
MAR.21.2014  
ONLY FOR  
RELEASE

Item	Part Name	Material / Finish	Qty
10	Gland Pin	Thermoplastic Color: Black	1
9	Gland Nut	Thermoplastic Color: Black	1
8	Cage	Thermoplastic Color: White	1
7	Gland	Silicone Color: Green	1
6	Cover	Thermoplastic Color: Black	1
5	Gasket	Silicone Color: Black	1
4	Contacts	Copper Alloy Finish: Au Plated	8
3	Base	Thermoplastic Color: Black	1
2	D-Ring	Silicone Color: Red	1
1	Housing	Thermoplastic Color: Black	1

TITLE C3 5A 8P Field Installable Cable To Cable Male Crimp Lock

DRAWING NUMBER GT153294-22080 REV. 01

A

A

B

B

C

C

D

D

THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET
1	B	1:1	Joyce 03/21/14	Lucas 03/21/14	Roy 03/21/14	XX ± 0.5 XXX ± 0.2	XXXX ± 0.05 ANGLES ± 1°	mm 1/1

1

2

3

4

GT Contact CD, LTD  
NOTICE OF PROPRIETARY PROPERTY:  
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CD, LTD. THE POSSESSOR AGREES TO THE FOLLOWING:  
1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
2) NOT TO REPRODUCE OR DISSEMINATE IT IN WHOLE OR PART  
(3) ALL RIGHTS RESERVED