



- Notes: (Unless Otherwise Specified)
1. Waterproof Rate: IP67.
 2. Recommend Cable Diameter: 5.0 to 6.0 mm
 3. Recommend Cover Torque: 6.0 to 7.0 Kg-cm.
 4. Recommend Gland Nut Torque: 9.0 to 10.0 Kg-cm.
 5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 09/24/12	Lucas 09/24/12	Roy 09/24/12

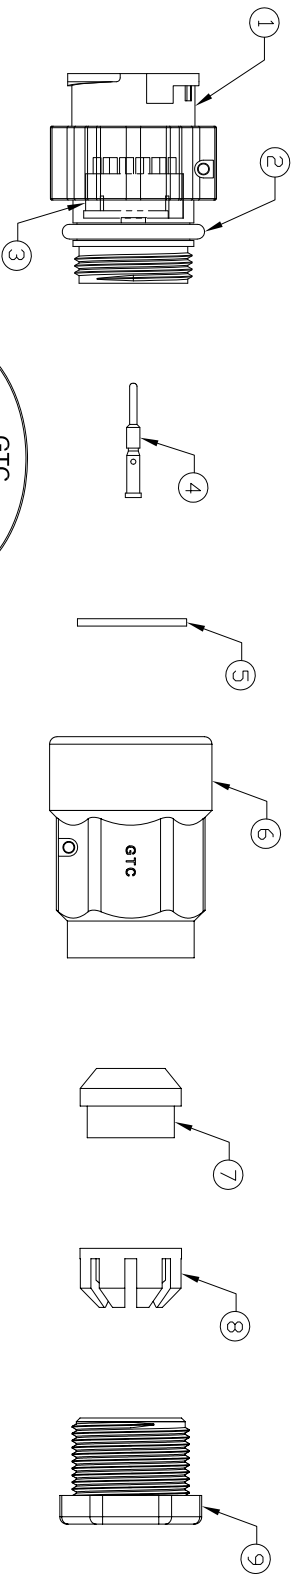

GTC
DOC.CENTER.ISSUE
SEP.24.2012
ONLY FOR
RELEASE

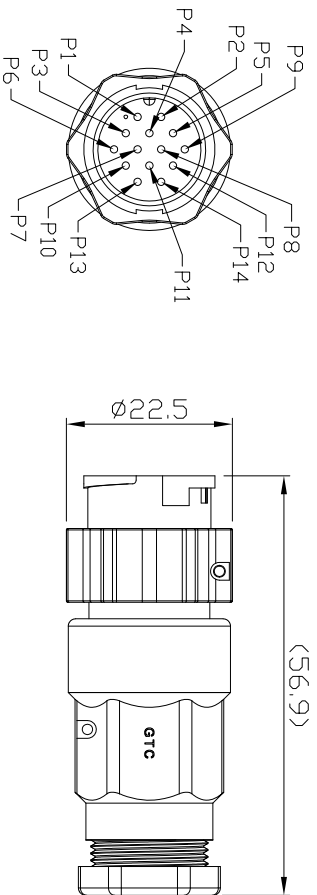

Pin Assignment

Item	Part Name	Material / Finish	Qty
1	Housing	Thermoplastic Color: Black	1
2	D-Ring	Silicone Color: Red	1
3	Base	Thermoplastic Color: Black	1
4	Contacts	Copper Alloy Finish: Au Plated	14
5	Gasket	Silicone Color: Black	1
6	Cover	Thermoplastic Color: Black	1
7	Gland	Silicone Color: Green	1
8	Cage	Thermoplastic Color: White	1
9	Gland Nut	Thermoplastic Color: Black	1

TITLE C3 5A 14P Field Installable Cable To Cable Male Crimp Lock

DD NOT SCALE DRAWINGS	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	DRAWING NUMBER	REV.
	B	1:1	Vicky 10/12/10	Roy 10/12/10	Roy 10/12/10	GT153294-22140	A0
THIRD ANGLE PROJECTION						TOLERANCES	
						± 0.5 XXXX ANGLES ± 1°	mm 1/1
							SHEET

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE AND NOT TO REPRODUCE OR PUBLISH IT IN WHOLE OR PART (S) ALL RIGHTS RESERVED