




Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Cable Diameter: 5.0 to 6.0 mm
3. Recommend Cover Torque: 6.0 to 7.0 Kg-cm.
4. Recommend Gland Nut Torque: 9.0 to 10.0 Kg-cm.
5. RoHS Compliant.


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Lucas 12/22/14	Lucas 12/22/14	Ray 12/22/14

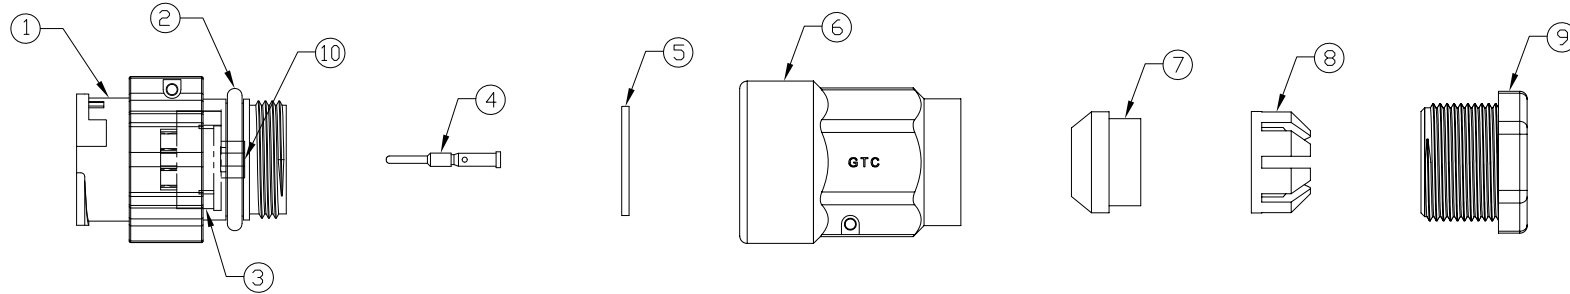

10	Gland Pin	Thermoplastic Color: Black	2
9	Gland Nut	Thermoplastic Color: Black	1
8	Cage	Thermoplastic Color: White	1
7	Gland	Silicone Color: Green	1
6	Cover	Thermoplastic Color: Black	1
5	Gasket	Silicone Color: Black	1
4	Contacts	Copper Alloy Finish: Au Plated	3
3	Base	Thermoplastic Color: Black	1
2	O-Ring	Silicone Color: Red	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty



Pin Assignment

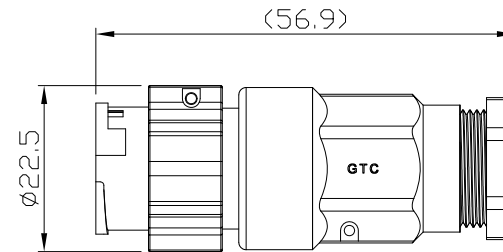

TITLE						DRAWING NUMBER			REV.		
C3 10A 3P Field Installable Cable To Cable Male Crimp Lock						GT153294-23030			A0		
	B	1:1	Lucas 12/22/14	Lucas 12/22/14	Ray 12/22/14	X.X X.XX	± 0.5 ± 0.2	X.XXX ANGLES	± 0.05 ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET		

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (ii) NOT TO REPRODUCE OR COPY IT
 (iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (iv) ALL RIGHTS RESERVED