

1


2

3



4

- Notes: (Unless Otherwise Specified)
1. Waterproof Rate: IP67.
 2. Recommend Cable Diameter: 5.0 to 6.0 mm
 3. Recommend Cover Torque: 6.0 to 7.0 Kg-cm.
 4. Recommend Gland Nut Torque: 9.0 to 10.0 Kg-cm.
 5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 05/15/14	Lucas 05/15/14	Roy 05/15/14

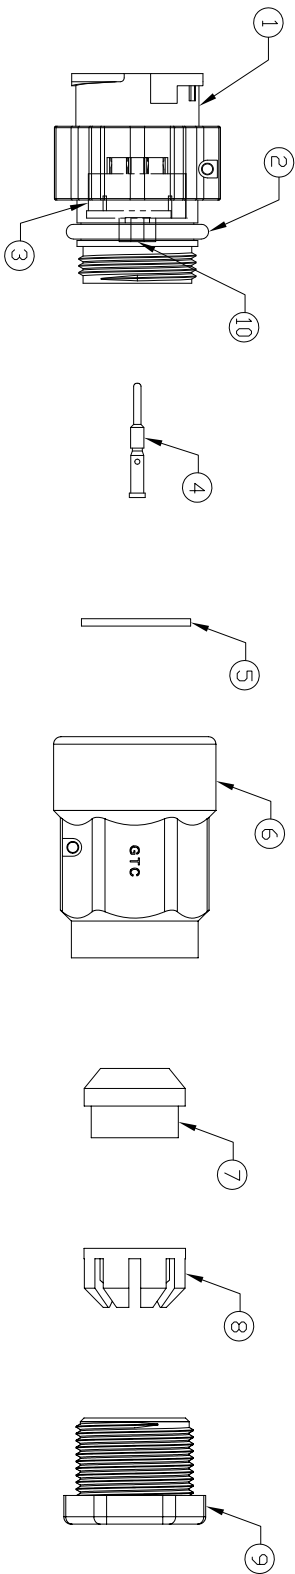

GTC
DOC.CENTER,ISSUE
MAY.16.2014
ONLY FOR
RELEASE

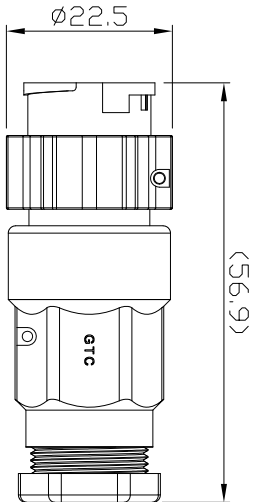

Item	Part Name	Material / Finish	Qty
10	Gland Pin	Thermoplastic Color: Black	1
9	Gland Nut	Thermoplastic Color: Black	1
8	Cage	Thermoplastic Color: White	1
7	Gland	Silicone Color: Green	1
6	Cover	Thermoplastic Color: Black	1
5	Gasket	Silicone Color: Black	1
4	Contacts	Copper Alloy Finish: Au Plated	4
3	Base	Thermoplastic Color: Black	1
2	D-Ring	Silicone Color: Red	1
1	Housing	Thermoplastic Color: Black	1

TITLE C3 10A 4P Field Installable Cable To Cable Male Crimp Lock

DRAWING NUMBER GT153294-23040 REV. A0

A

A

B

B

C

C

D

D

THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET
1	B	1:1	Joyce 05/15/14	Lucas 05/15/14	Roy 05/15/14	± 0.5 ± 0.2	mm	1/1

1

2

3

4

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:

1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE

2) NOT TO REPRODUCE OR PUBLISH IT IN WHOLE OR PART

3) ALL RIGHTS RESERVED