

1

2

3


4

Notes: (Unless Otherwise Specified)



- 1. Waterproof Rate: IP67.
- 2. Recommend Cable Diameter: 5.0 to 6.0 mm
- 3. Recommend Cover Torque: 6.0 to 7.0 Kg-cm.
- 4. Recommend Gland Nut Torque: 9.0 to 10.0 Kg-cm.
- 5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Jimmy 08/29/16	Lucas 08/29/16	Ray 08/29/16

GTC
R&D DEPT. ISSUE
AUG.29.2016
ONLY FOR
RELEASE

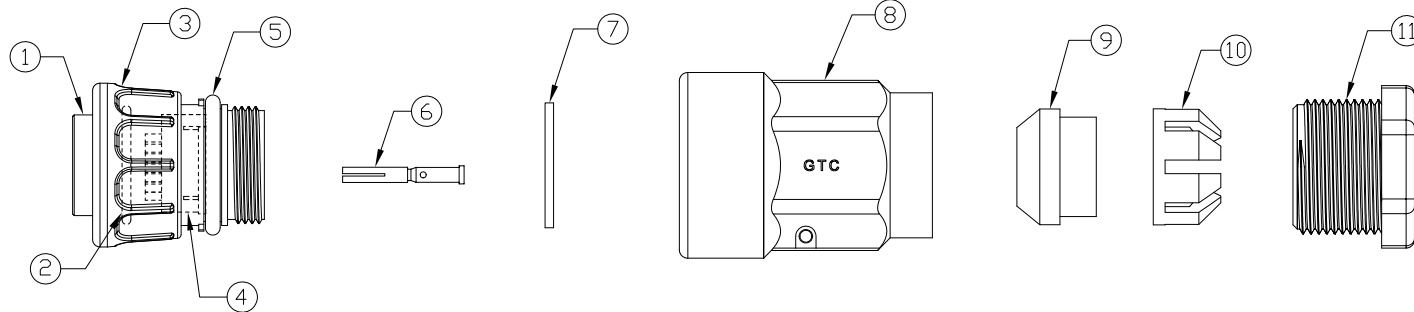

11	Gland Nut	Thermoplastic Color: Black	1
10	Cage	Thermoplastic Color: White	1
9	Gland	Silicone Color: Green	1
8	Cover	Thermoplastic Color: Black	1
7	Gasket	Silicone Color: Black	1
6	Contacts	Copper Alloy Finish: Au Plated	9
5	O-ring	Silicone Color: Red	1
4	Base	Thermoplastic Color: Black	1
3	Screw Nut	Thermoplastic Color: Black	1
2	O-ring	Silicone Color: Red	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty

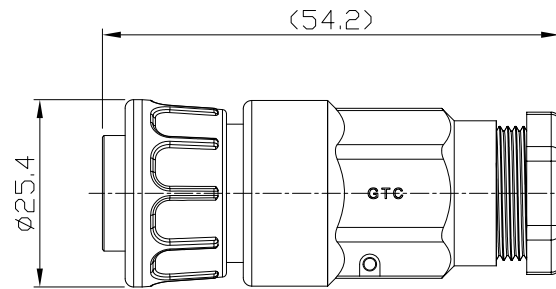

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (ii) NOT TO REPRODUCE OR COPY IT
 (iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (iv) ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER			REV.
C3 5A 9P Field Installable Cable End Female Crimp Screw						GT153364-22090			01
	B	1:1	Jimmy 08/29/16	Lucas 08/29/16	Ray 08/29/16	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

1

2

3

4