

1

2



3

4

Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP67.
- 2. Recommend Panel Thickness: 0.8 to 4.0 mm.
- 3. Recommend Torque: 19~20 Kgf-cm.
- 4. Mating Cap P/N: GT1C5421X2.
- 5. RoHS Compliant.

| REV | ECN# | DESCRIPTION OF REVISION | DRAW BY DATE | CHECK BY DATE | APPROVE BY DATE |
|-----|------|-------------------------|----------------|-----------------|-----------------|
| 02 | | Marked | Karen 07/29/08 | Robbie 07/29/08 | Robbie 07/29/08 |
| 03 | | Marked | Karen 09/15/08 | Robbie 09/15/08 | Robbie 09/15/08 |

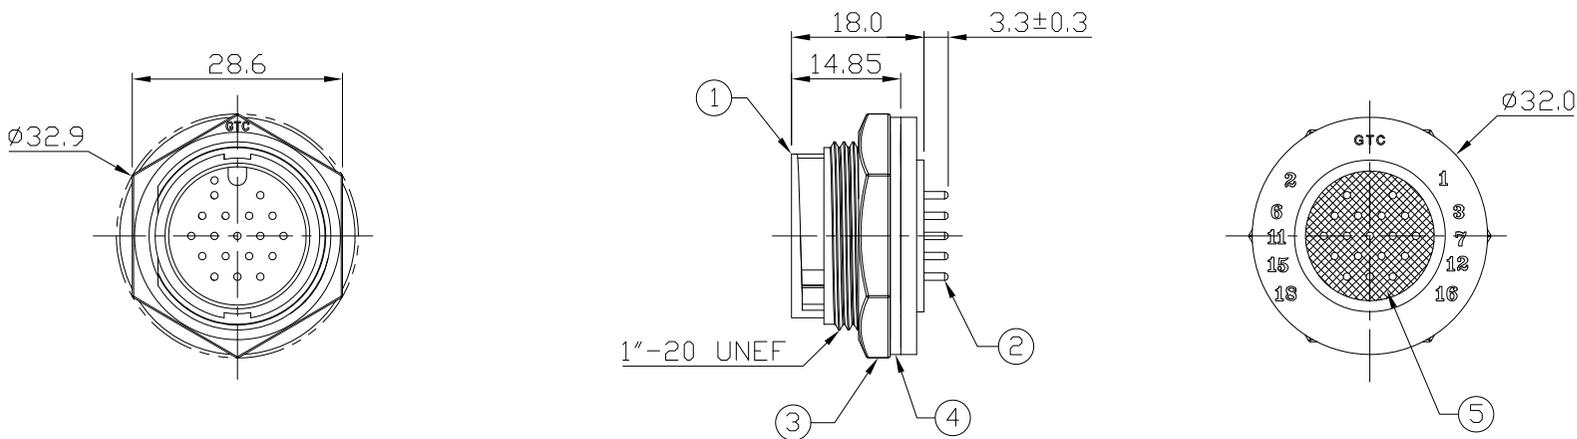

Recommend Panel Cut-Out

GTC
R&D DEPT. ISSUE
SEP.16.2008
ONLY FOR
RELEASE

| 5 | Glue | Epoxy Color: Black | |
|------|-----------|-----------------------------------|-----|
| 4 | Gasket | Silicone Color: Black | 1 |
| 3 | Hex Nut | Thermoplastic Color: Black | 1 |
| 2 | Contacts | Copper Alloy Finish: Au Plated | 18 |
| 1 | Housing | Thermoplastic Color: Black | 1 |
| Item | Part Name | Material / Finish | Qty |

| TITLE | | | | | | DRAWING NUMBER | | | REV. |
|-------------------------------|------|-------|----------------|-----------------|-----------------|-------------------------|-----------------------------|------|-------|
| C4 5A 18P Panel Male Dip Lock | | | | | | GT154210-12180 | | | 03 |
| | B | 1:1 | Karen 06/26/08 | Robbie 06/26/08 | Robbie 06/26/08 | X.X ± 0.5 X.XX ± 0.2 | X.XXX ± 0.05 ANGLES ± 1° | mm | 1/1 |
| THIRD ANGLE PROJECTION | SIZE | SCALE | DRAW / DATE | CHECK / DATE | APPROVE / DATE | TOLERANCES | | UNIT | SHEET |

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:

- (a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
- (b) NOT TO REPRODUCE OR COPY IT
- (c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
- (d) ALL RIGHTS RESERVED

1

2

3

4