



Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0			Jenny 08/25/22	Lucas 08/25/22	Ray 08/25/22

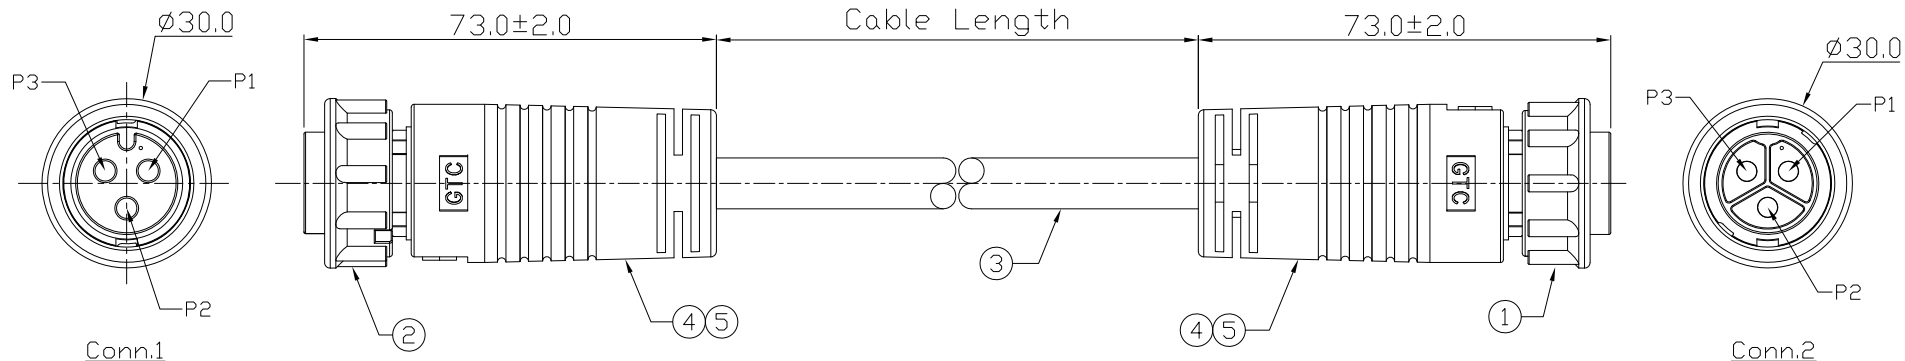

GT1542B4-25031-10(F)	10000 mm	+500
GT1542B4-25031-09(F)	9000 mm	+450
GT1542B4-25031-08(F)	8000 mm	+400
GT1542B4-25031-07(F)	7000 mm	+150
GT1542B4-25031-06(F)	6000 mm	+150
GT1542B4-25031-05(F)	5000 mm	+150
GT1542B4-25031-04(F)	4000 mm	+150
GT1542B4-25031-03(F)	3000 mm	+100
GT1542B4-25031-02(F)	2000 mm	+100
GT1542B4-25031-01(F)	1000 mm	+50
GT1542B4-25031-Z9(F)	900 mm	+50
GT1542B4-25031-Z8(F)	800 mm	+50
GT1542B4-25031-Z7(F)	700 mm	+50
GT1542B4-25031-Z6(F)	600 mm	+50
GT1542B4-25031-Z5(F)	500 mm	+50
GT1542B4-25031-Z4(F)	400 mm	+50
GT1542B4-25031-Z3(F)	300 mm	+25
GT1542B4-25031-Z2(F)	200 mm	+25
Part No.	Cable Length	Tol.



Wiring Diagram

5	Over Mold	PVC Color: Black	2
4	Inner Mold	Thermoplastic Color: White or Black	2
3	Cable	UL2464 3C*12AWG+Al/My, OD=9.0mm ID=9.0mm, Color: Black	1
2	C4 30A 3P Cable End Female Lock	GT Contact P/N: GT154224-25031-XX(F)	1
1	C4 30A 3P Cable End Male Lock	GT Contact P/N: GT154234-25031-XX(F)	1
Item	Part Name	Material / Finish	Q'ty

TITLE						DRAWING NUMBER			REV.
C4 30A 3P Cable End Dual Female / Male Lock With Cable						GT1542B4-25031-XX(F)			A0
	B	1:1	Jenny 08/25/22	Lucas 08/25/22	Ray 08/25/22	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

**GT Contact CO.,LTD**

NOTICE OF PROPRIETARY PROPERTY:  
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
(ii) NOT TO REPRODUCE OR COPY IT  
(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
(iv) ALL RIGHTS RESERVED