



Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0			Jenny 08/25/22	Lucas 08/25/22	Ray 08/25/22

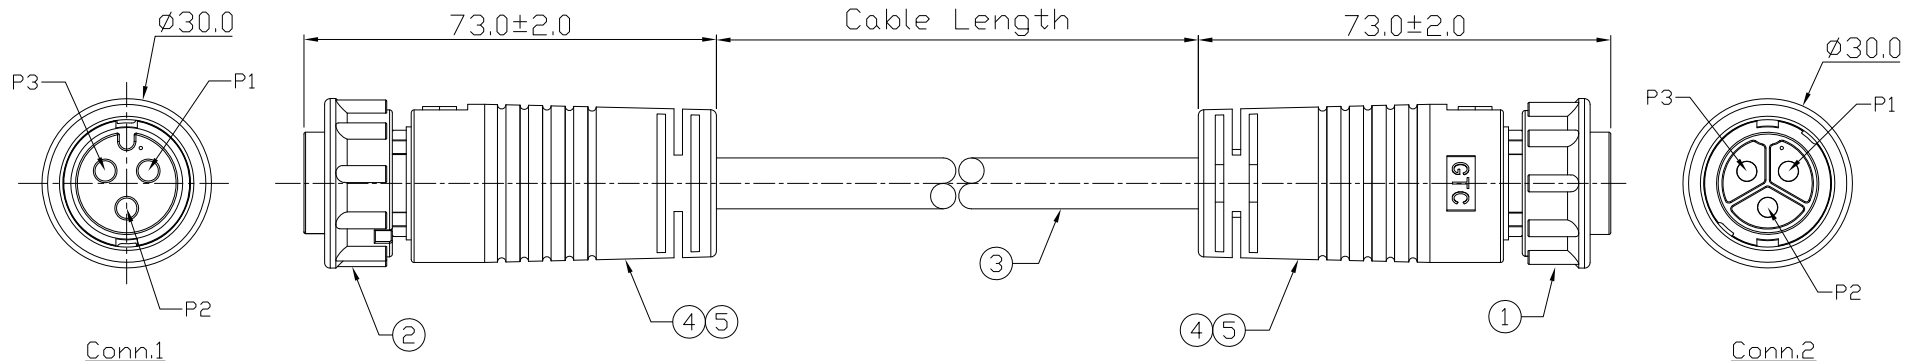

GT1542B4-25031-10(F)	10000 mm	+500
GT1542B4-25031-09(F)	9000 mm	+450
GT1542B4-25031-08(F)	8000 mm	+400
GT1542B4-25031-07(F)	7000 mm	+150
GT1542B4-25031-06(F)	6000 mm	+150
GT1542B4-25031-05(F)	5000 mm	+150
GT1542B4-25031-04(F)	4000 mm	+150
GT1542B4-25031-03(F)	3000 mm	+100
GT1542B4-25031-02(F)	2000 mm	+100
GT1542B4-25031-01(F)	1000 mm	+50
GT1542B4-25031-Z9(F)	900 mm	+50
GT1542B4-25031-Z8(F)	800 mm	+50
GT1542B4-25031-Z7(F)	700 mm	+50
GT1542B4-25031-Z6(F)	600 mm	+50
GT1542B4-25031-Z5(F)	500 mm	+50
GT1542B4-25031-Z4(F)	400 mm	+50
GT1542B4-25031-Z3(F)	300 mm	+25
GT1542B4-25031-Z2(F)	200 mm	+25
Part No.	Cable Length	Tol.



Wiring Diagram

Item	Part Name	Material / Finish	Q'ty
5	Over Mold	PVC Color: Black	2
4	Inner Mold	Thermoplastic Color: White or Black	2
3	Cable	UL2464 3C*12AWG+Al/My, OD=9.0mm ID=9.0mm, Color: Black	1
2	C4 30A 3P Cable End Female Lock	GT Contact P/N: GT154224-25031-XX(F)	1
1	C4 30A 3P Cable End Male Lock	GT Contact P/N: GT154234-25031-XX(F)	1

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:  
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
(ii) NOT TO REPRODUCE OR COPY IT  
(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
(iv) ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER			REV.
C4 30A 3P Cable End Dual Female / Male Lock With Cable						GT1542B4-25031-XX(F)			A0
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET
	B	1:1	Jenny 08/25/22	Lucas 08/25/22	Ray 08/25/22	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1