

4


3

2

1

⚠ Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IPX7(Mating).
2. Cable Diameter: 3.5 to 4.0 mm
3. Cover Torque:
2.5 to 3.0 Kg-cm Tightening Torque.
4. Gland Nut Torque:
6.5 to 7.0 Kg-cm Tightening Torque.
5. RoHS Compliance.

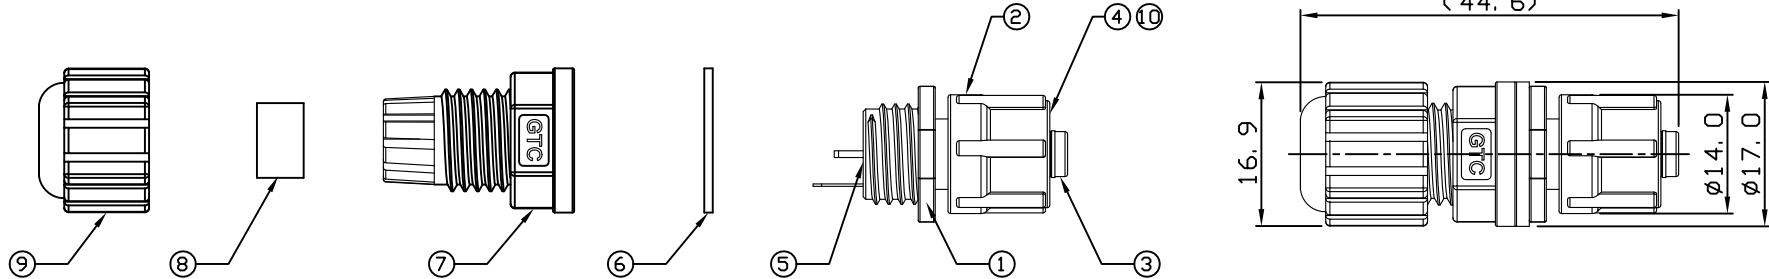

REV	ECN#	DESCRIPTION OF REVISION	
A0		Mass Production	043010
A1	ECN-100609	Marked ⚠	061010

Item	Part Name	Material/Finish	Q'ty
1	Housing	Thermal Plastic Color: Black	1
2	Screw Nut	Thermal Plastic Color: Black	1
3	DC Plug	Insulator: Thermal Plastic Color: Black	1
		Neg. Terminal: Copper Alloy Finish: Ni Plated	1
		Pos. Terminal: Copper Alloy Finish: Ni Plated	1
4	O-Ring	Silicone Black: Red	1
5	Glue	Epoxy Color: Black	
6	Gasket	EPDM Color: Black	1
7	Cover	Thermal Plastic Color: Black	1
8	Gland	NBR Color: Black	1
9	Gland Nut	Thermal Plastic Color: Black	1
10	C-Ring	SWB Finish: Zn Plated	1

GTC
DOC.CENTER.ISSUE
JUN.11.2010
ONLY FOR
RELEASE

METRIC		GT Contact CO., LTD	
DRAFTER Lucas	DATE 06/10/10	NOTICE OF PROPRIETARY PROPERTY: THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO., LTD THE POSSESSOR AGREES TO THE FOLLOWING: (I) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE (II) NOT TO REPRODUCE OR COPY IT (III) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART (IV) ALL RIGHTS RESERVED	
APPROVED Ray	DATE 06/10/10		
DIMENSIONS ARE IN MILLIMETER TOLERANCES X.X ±0.5 X.XX ±0.20 X.XXX ±0.05 ANGLES ±0.5° DO NOT SCALE DRAWINGS		TITLE DC Plug Field Installable, 2.5mm Plug Solder, Screw	
THIRD ANGLE PROJECTION		DRAWING NUMBER GT1B0202	REV. A1
SIZE B		SCALE 1:1	SHT 1 OF 1