

1

2




3

4

- Notes: (Unless Otherwise Specified)
1. Waterproof Rate: IP67.
 2. Suitable Cable OD=6.0mm To 8.5mm.
 3. Recommend Cover Torque: 6~7 Kgf-cm.
 4. Recommend Gland Nut Torque: 9~10 Kgf-cm.
 5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Lucas 05/03/13	Roy 05/03/13	Roy 05/03/13

GTC
R&D DEPT. ISSUE
MAY.03.2013
ONLY FOR
RELEASE

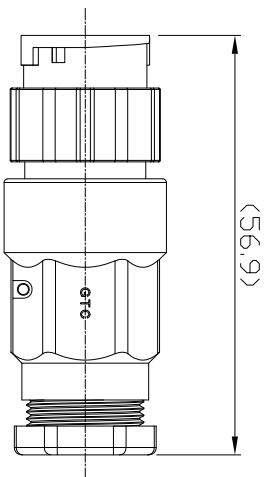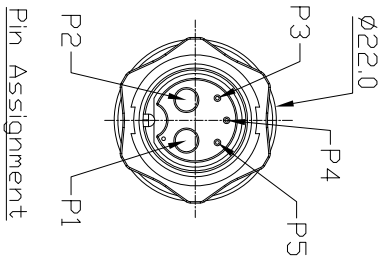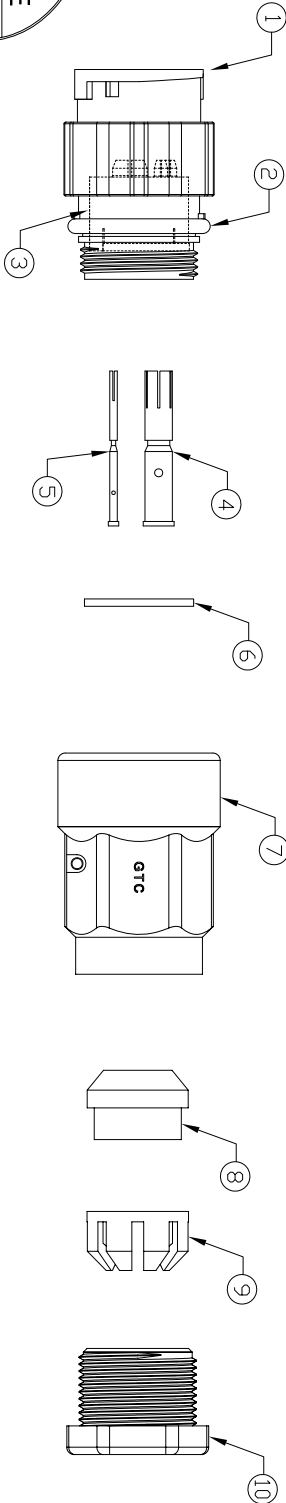

Item	Part Name	Material / Finish	Qty
10	Gland Nut	Thermoplastic Color: Black	1
9	Cage	Thermoplastic Color: White	1
8	Gland	Silicone Color: Red	1
7	Cover	Thermoplastic Color: Black	1
6	Gasket	Silicone Color: Black	1
5	IA Contacts	Copper Alloy Finish: Au Plated	3
4	25A Contacts	Copper Alloy Finish: Au Plated	2
3	Base	Thermoplastic Color: Black	1
2	D-Ring	Silicone Color: Red	1
1	Housing	Thermoplastic Color: Black	1

TITLE
Hybrid C3 25A+1A 2P+3P Field Installable Cable To Cable Female Crimp Lock

DRAWING NUMBER
GT1D3252-2C235

REV.
01

THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET
	B	1:1	Lucas 05/03/13	Roy 05/03/13	Roy 05/03/13	XX ± 0.5 XXX ± 0.2	mm	1/1

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR ABRES TO THE FOLLOWING

DO NOT TO REVERSE ENGINEER OR DISSEMINATE IT IN WHOLE OR PART (S) ALL RIGHTS RESERVED

A

A

B

B

C

C

D

D

1

2

3

4