



Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. Recommend Panel Thickness: 0.8 to 8.0 mm.
3. Recommend Torque: 19~20 Kgf-cm.
4. Mating Cap P/N: GT1C5231X2/GT2C123012.
5. RoHS Compliant.


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
02	ECN-240501	Updated The USB Receptacles Insulator From White To Black Color.	Aileen 08/23/24	Hank 08/23/24	Lucas 08/23/24

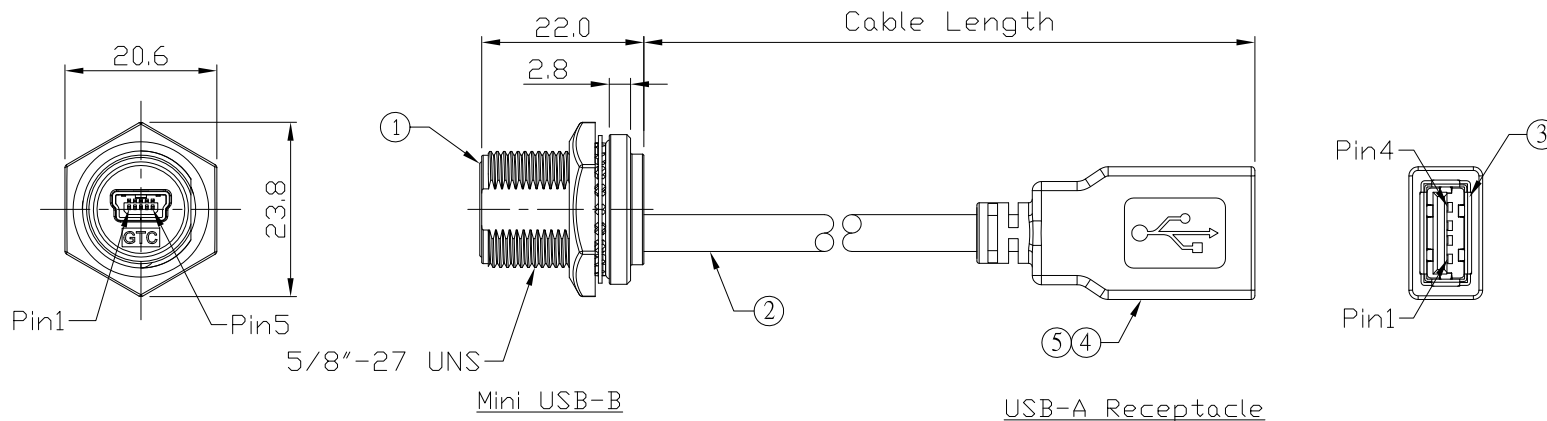

GT214300-06-10	10000mm	+500
GT214300-06-09	9000mm	+450
GT214300-06-08	8000mm	+400
GT214300-06-07	7000mm	+150
GT214300-06-06	6000mm	+150
GT214300-06-05	5000mm	+150
GT214300-06-04	4000mm	+150
GT214300-06-03	3000mm	+100
GT214300-06-02	2000mm	+100
GT214300-06-01	1000mm	+50
GT214300-06-Z9	900mm	+50
GT214300-06-Z8	800mm	+50
GT214300-06-Z7	700mm	+50
GT214300-06-Z6	600mm	+50
GT214300-06-Z5	500mm	+50
GT214300-06-Z4	400mm	+50
GT214300-06-Z3	300mm	+25
GT214300-06-Z2	200mm	+25
Part No.	Cable Length	Tol.



Front View
Recommend
Panel Cut-Out

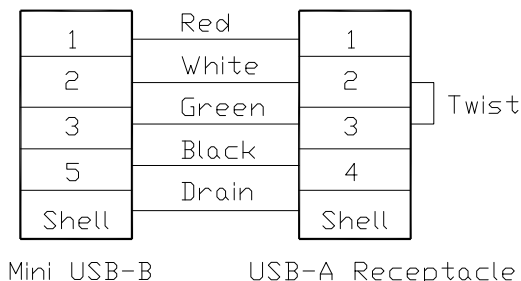

Wiring Diagram

5	Over Mold	PVC Color: Black	1
4	Inner Mold	Thermoplastic Color: White Or Black	1
3	USB-A Receptacle	Housing: Thermoplastic Contacts: Copper Alloy, Finish: Gold Flash Shell: SPCC, Finish: Ni Plated	1
2	Cable	UL2725 1P*28AWG+2C*24AWG+Al/My+D+B DD=5.0mm, Color: Black	1
1	Mini USB-B Metal C2 Panel Jack Screw With Cable	GTC Connector P/N: GT214300-03-XX	1
Item	Part Name	Material / Finish	Q'ty

TITLE						DRAWING NUMBER			REV.
Mini USB-B Metal C2 Panel Jack Screw With Cable + USB-A Receptacle						GT214300-06-XX			02
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
						TOLERANCES		UNIT	SHEET

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
(a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(b) NOT TO REPRODUCE OR COPY IT
(c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(d) ALL RIGHTS RESERVED