


Notes: (Unless Otherwise Specified)  
 1. Waterproof Rate: IP68.  
 2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A1	CH-101001	Redraw	Joyce 10/03/11	Lucas 10/03/11	Ray 10/03/11
A2	ECN-180118	Modify Drawing	Lucas 01/25/18	Lucas 01/25/18	Ray 01/25/18

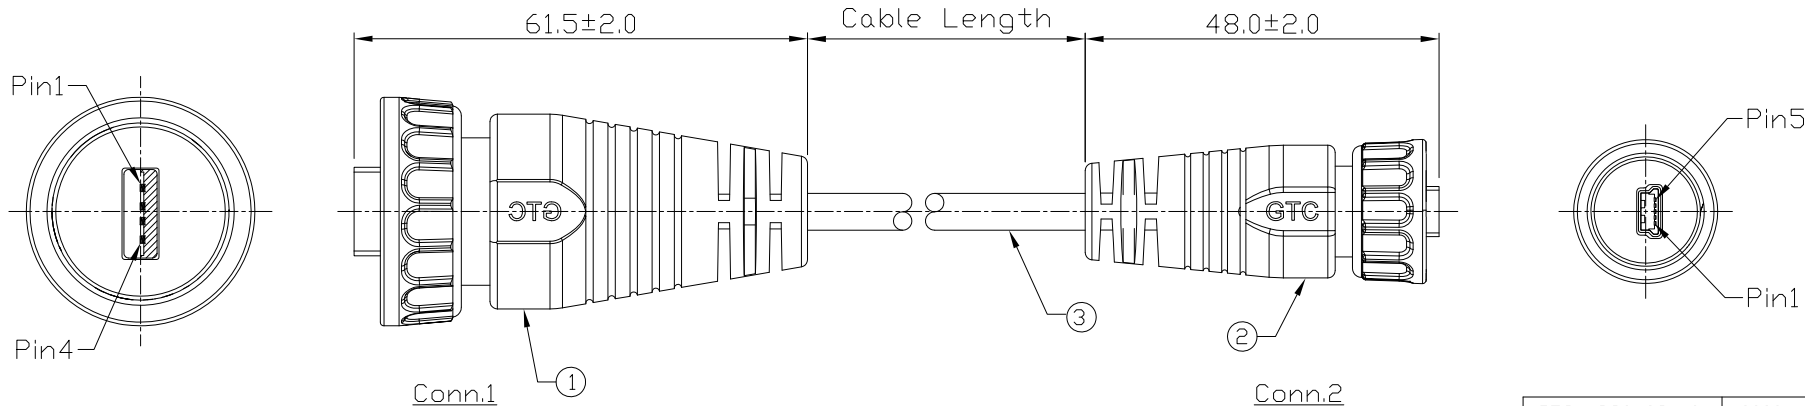

1	Red	24AWG	1
2	White	28AWG	2
3	Green	28AWG	3
	N/C		4
4	Black	24AWG	5
Shell	Drain		Shell

Wiring Diagram

GT214320-0C-10	10000 mm	±500
GT214320-0C-09	9000 mm	±450
GT214320-0C-08	8000 mm	±400
GT214320-0C-07	7000 mm	±350
GT214320-0C-06	6000 mm	±300
GT214320-0C-05	5000 mm	±250
GT214320-0C-04	4000 mm	±200
GT214320-0C-03	3000 mm	±150
GT214320-0C-02	2000 mm	±100
GT214320-0C-01	1000 mm	±50
GT214320-0C-Z9	900 mm	±40
GT214320-0C-Z6	600 mm	±40
GT214320-0C-Z5	500 mm	±40
Part No.	Cable Length	Tol.

Item	Part Name	Material / Finish	Q'ty
3	Cable	UL2725 28AWG*1P+24AWG*2C+Al/My+D+B Color: Black,DD=5.0mm	1
2	Mini USB-B Metal C2 Cable End Screw	GTC Connector P/N: GT214320-01-XX	1
1	USB-A Metal C4 Cable End Plug Screw	GTC Connector P/N: GT211320-01-XX	1

TITLE						DRAWING NUMBER			REV.
Twin-head Metal Mini USB-B C2 Cable End Plug Screw & USB-A C4 Cable End Screw						GT214320-0C-XX			A2
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET	
	B	1:1	Karen 09/02/09	Ray 09/02/09	Ray 09/02/09	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm 1/1	

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:  
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
 (i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
 (ii) NOT TO REPRODUCE OR COPY IT  
 (iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
 (iv) ALL RIGHTS RESERVED