


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. RoHS Compliance.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 10/03/11	Lucas 10/03/11	Ray 10/03/11

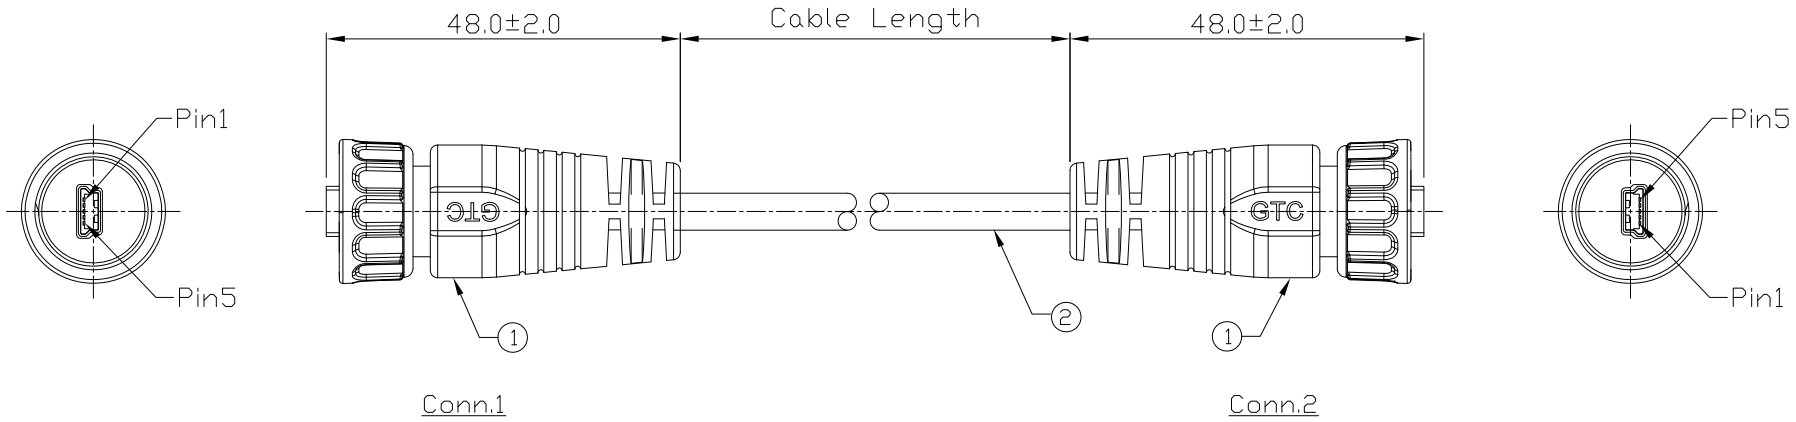

1	Red	24AWG	1
2	White	28AWG	2
3	Green	28AWG	3
4	Yellow	24AWG	4
5	Black	24AWG	5
Shell	Drain/Braid		Shell

Wiring Diagram

GT214320-0G-10	10000 mm	±500
GT214320-0G-09	9000 mm	±450
GT214320-0G-08	8000 mm	±400
GT214320-0G-07	7000 mm	±350
GT214320-0G-06	6000 mm	±300
GT214320-0G-05	5000 mm	±250
GT214320-0G-04	4000 mm	±200
GT214320-0G-03	3000 mm	±150
GT214320-0G-02	2000 mm	±100
GT214320-0G-01	1000 mm	±50
GT214320-0G-Z9	900 mm	±40
GT214320-0G-Z6	600 mm	±40
GT214320-0G-Z5	500 mm	±40
Part No.	Cable Length	Tol.

Item	Part Name	Material / Finish	Q'ty
2	Cable	UL2725 28AWG*1P+24AWG*3C+Al/My+D+B Color: Black,DD=5.0mm	1
1	Mini USB-B Metal C2 Cable End Screw	GTC Connector P/N: GT214320-0F-XX	2

TITLE						DRAWING NUMBER			REV.
Mini USB-B Metal C2 Cable End Twin-head Plug Screw						GT214320-0G-XX			A0
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET	
	B	1:1	Joyce 10/03/11	Lucas 10/03/11	Ray 10/03/11	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm 1/1	

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:  
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
(ii) NOT TO REPRODUCE OR COPY IT  
(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
(iv) ALL RIGHTS RESERVED