

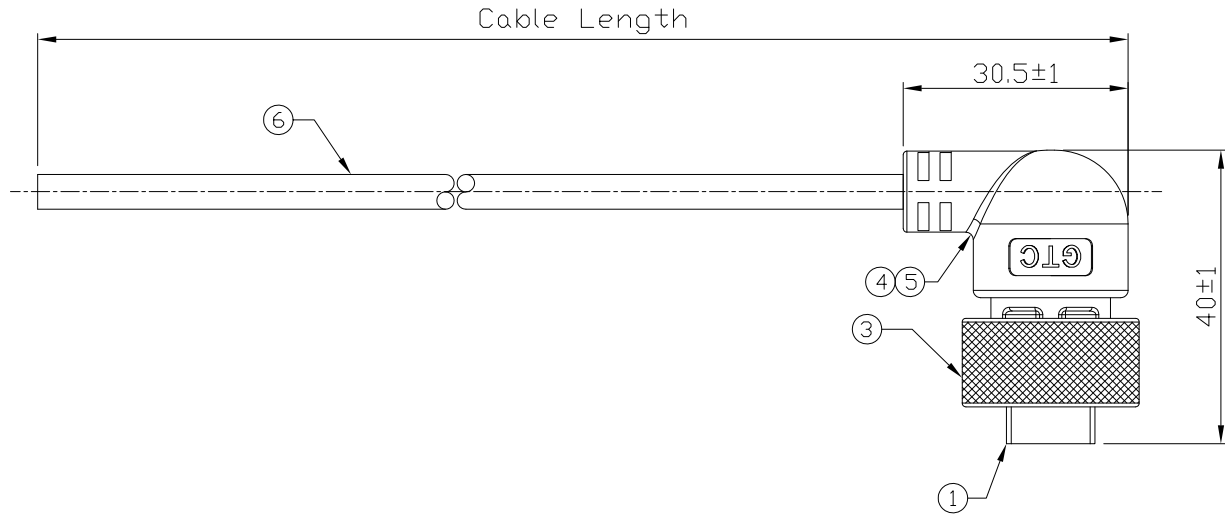


Notes: (Unless Otherwise Specified)
 1. Waterproof Rate: IP68.
 2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Lucas 11/28/19	Lucas 11/28/19	Ray 11/28/19



GTC
 DOC.CENTER.ISSUE
 NOV.28.2019
 ONLY FOR
 RELEASE

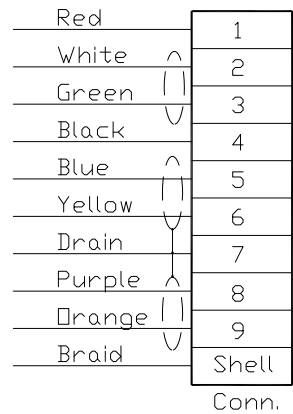

Part No.	Cable Length	Tol.
GT218329-01-03	3000 mm	+100
GT218329-01-02	2000 mm	+100
GT218329-01-01	1000 mm	+50
GT218329-01-Z9	900 mm	+50
GT218329-01-Z8	800 mm	+50
GT218329-01-Z7	700 mm	+50
GT218329-01-Z6	600 mm	+50
GT218329-01-Z5	500 mm	+50
GT218329-01-Z4	400 mm	+50
GT218329-01-Z3	300 mm	+25
GT218329-01-Z2	200 mm	+25

Item	Part Name	Material / Finish	Q'ty
6	Cable	UL2725 (1P*28AWG+EAM)*2+(1PR*28AWG+A)+2C*22AWG+AB 85% Color: Black, OD=5.5mm	1
5	Over Mold	PVC Color: Black	1
4	Inner Mold	Thermoplastic Color: Black	1
3	Metal Screw Nut	Copper Alloy Finish: Ni Plated	1
2	Rubber Pad	Silicone Color: Black	1
1	USB-A 3.0 Plug	Housing: Thermoplastic, Color: Blue Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Au Plated	1

Wiring Diagram

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (b) NOT TO REPRODUCE OR COPY IT
 (c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (d) ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER			REV.	
USB-A 3.0 Metal C3 Cable End 90° Plug Screw With Cable						GT218329-01-XX			01	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	
	B	1:1	Lucas 11/28/19	Lucas 11/28/19	Ray 11/28/19	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	