


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Lucas 11/28/19	Lucas 11/28/19	Ray 11/28/19

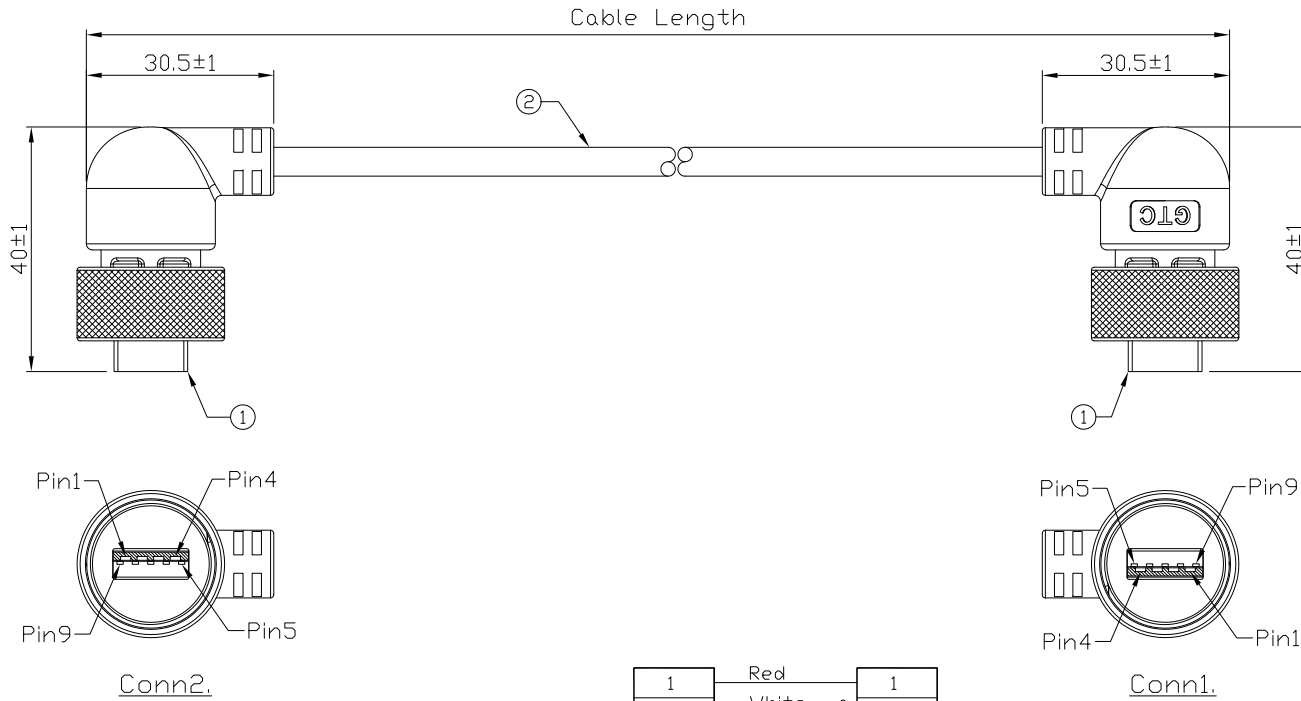

Item	Color	Item
1	Red	1
2	White	2
3	Green	3
4	Black	4
8	Blue	5
9	Yellow	6
7	Drain	7
5	Purple	8
6	Orange	9
Shell	Braid	Shell

Conn2. Conn1.  
Wiring Diagram

GT218329-0M-03	3000 mm	+100
GT218329-0M-02	2000 mm	+100
GT218329-0M-01	1000 mm	+50
GT218329-0M-Z9	900 mm	+50
GT218329-0M-Z8	800 mm	+50
GT218329-0M-Z7	700 mm	+50
GT218329-0M-Z6	600 mm	+50
GT218329-0M-Z5	500 mm	+50
GT218329-0M-Z4	400 mm	+50
GT218329-0M-Z3	300 mm	+25
GT218329-0M-Z2	200 mm	+25
Part No.	Cable Length	Tol.

Item	Part Name	Material / Finish	Q'ty
2	Cable	UL2725 (1P*28AWGEAM)*2+(1PR*28AWG+A)+2C*22AWG+AB 85% Color: Black, DD=5.5mm	1
1	USB-A 3.0 Metal C3 Cable End 90° Plug Screw	GT Contact P/N: GT218329-01-XX	2

TITLE						DRAWING NUMBER			REV.
USB-A 3.0 Metal C3 Twin-Head Cable End 90° Plug Screw						GT218329-0M-XX			01
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET	
	B	1:1	Lucas 11/28/19	Lucas 11/28/19	Ray 11/28/19	XX ± 0.5 XXX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm 1/1	

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:

(A) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE

(B) NOT TO REPRODUCE OR COPY IT

(C) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

(D) ALL RIGHTS RESERVED