


Notes: (Unless Otherwise Specified)  
 1. Waterproof Rate: IP68.  
 2. RoHS & REACH Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 05/02/17	Lucas 05/02/17	Ray 05/02/17

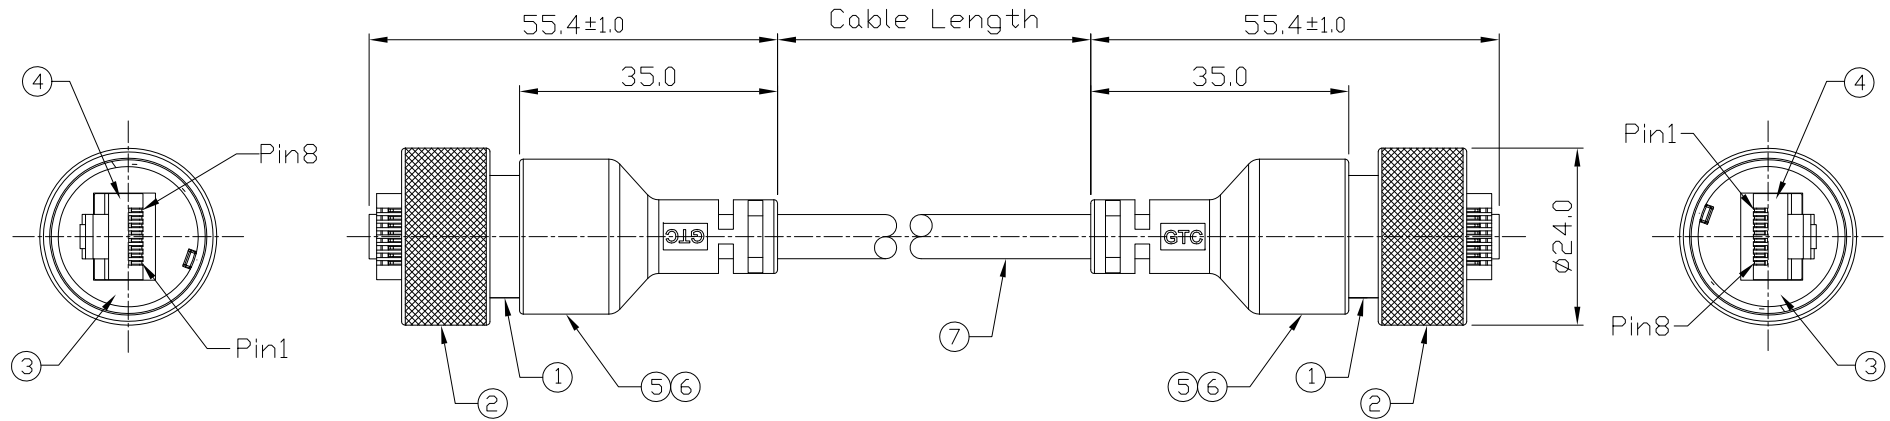

Item	Part Name	Material / Finish	QTY
7	Cable	CAT5E 24AWG*4P+Al/My+D Color: Black, OD=6.0mm	1
6	Over Mold	PVC Color: Black	2
5	Inner Mold	Thermoplastic Color: Black Or White	2
4	RJ45 Plug	Housing: Thermoplastic, Color: Clear Contacts: Copper Alloy, Finish: Au Plated	2
3	Rubber Pad	Silicone Color: Black	2
2	Screw Nut	Copper Alloy Finish: Ni Plated	2
1	Housing	Thermoplastic Color: Black	2

GTC  
 DOC.CENTER.ISSUE  
 MAY.03.2017  
 ONLY FOR  
 RELEASE



Part No.	Cable Length	Tol.
GT225520-07-10	10000 mm	+500
GT225520-07-09	9000 mm	+450
GT225520-07-08	8000 mm	+400
GT225520-07-07	7000 mm	+150
GT225520-07-06	6000 mm	+150
GT225520-07-05	5000 mm	+150
GT225520-07-04	4000 mm	+150
GT225520-07-03	3000 mm	+100
GT225520-07-02	2000 mm	+100
GT225520-07-01	1000 mm	+50
GT225520-07-Z9	900 mm	+50
GT225520-07-Z8	800 mm	+50
GT225520-07-Z7	700 mm	+50
GT225520-07-Z6	600 mm	+50
GT225520-07-Z5	500 mm	+50
GT225520-07-Z4	400 mm	+50
GT225520-07-Z3	300 mm	+25
GT225520-07-Z2	200 mm	+25

Wiring Diagram

TITLE						DRAWING NUMBER			REV.
RJ45 Metal C3 Shielded Cable End Plug Twin-Head Screw With Cable						GT225520-07-XX			A0
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET	
DD NOT SCALE DRAWINGS	B	1:1	Joyce 05/02/17	Lucas 05/02/17	Ray 05/02/17	X.X ± 0.5 X.XX ± 0.2	mm	1/1	
						X.XXX ± 0.05 ANGLES ± 1°			

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:  
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
 (a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
 (b) NOT TO REPRODUCE OR COPY IT  
 (c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
 (d) ALL RIGHTS RESERVED