


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0			Aileen 06/01/23	Hank 06/01/23	Lucas 06/01/23

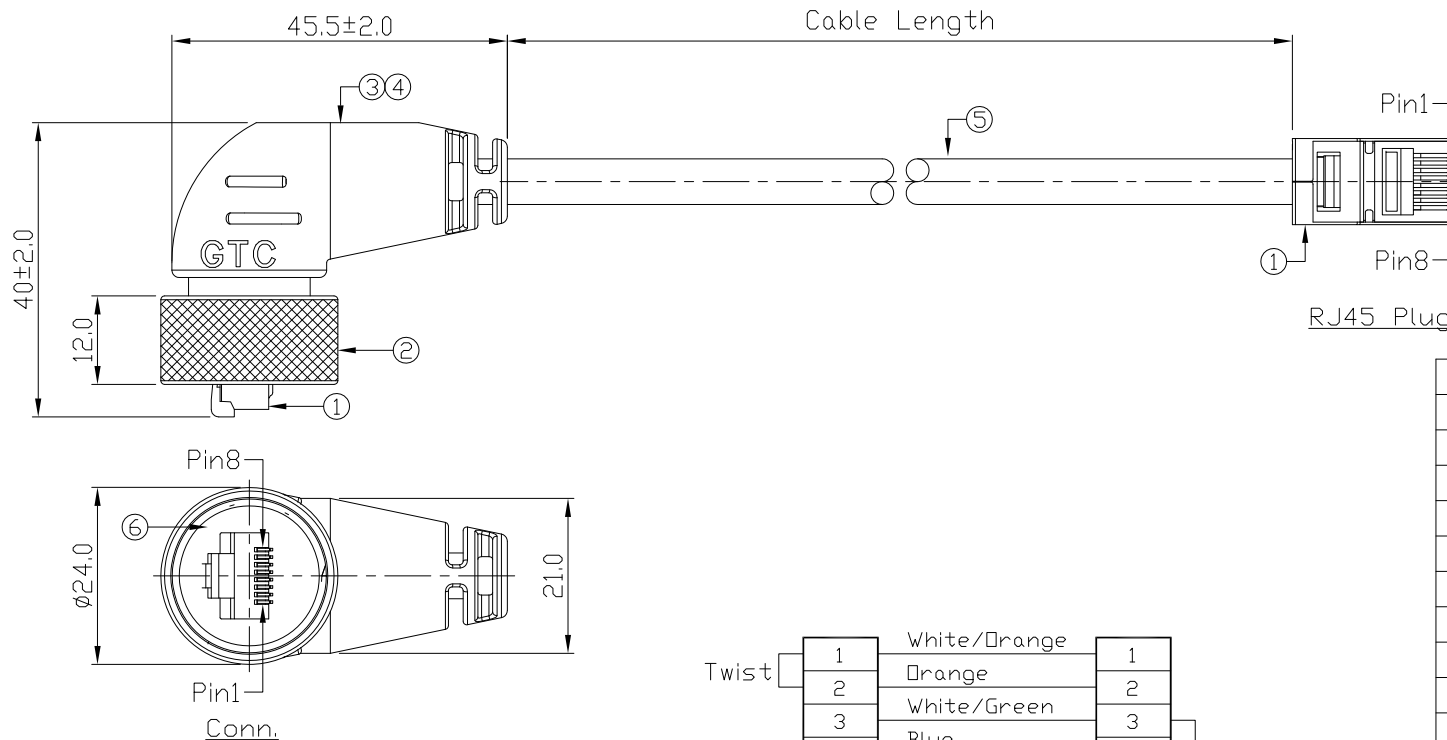

GTC
DOC.CENTER.ISSUE
JUN.02.2023
ONLY FOR
RELEASE

GT225525-06-10	10000 mm	+500
GT225525-06-09	9000 mm	+450
GT225525-06-08	8000 mm	+400
GT225525-06-07	7000 mm	+150
GT225525-06-06	6000 mm	+150
GT225525-06-05	5000 mm	+150
GT225525-06-04	4000 mm	+150
GT225525-06-03	3000 mm	+100
GT225525-06-02	2000 mm	+100
GT225525-06-01	1000 mm	+50
GT225525-06-Z9	900 mm	+50
GT225525-06-Z8	800 mm	+50
GT225525-06-Z7	700 mm	+50
GT225525-06-Z6	600 mm	+50
GT225525-06-Z5	500 mm	+50
GT225525-06-Z4	400 mm	+50
GT225525-06-Z3	300 mm	+25
GT225525-06-Z2	200 mm	+25

6	Rubber Pad	Silicone Color: Black	1
5	Cable	CAT5E 24AWG*4P+AL/My+D Color: Black, DD=6.0mm	1
4	Over Mold	PVC Color: Black	1
3	Inner Mold	Thermoplastic Color: Black	1
2	Screw Nut	Copper Alloy Finish: Ni Plated	1
1	RJ45 Plug	Housing: Thermoplastic; Color: Clean Contacts: Copper Alloy; Finish: Au Plated Shell: Cold Roll Steel; Finish: Ni Plated	2
Item	Part Name	Material / Finish	Q'ty



Part No.	Cable Length	Tol.
----------	--------------	------

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (2) NOT TO REPRODUCE OR COPY IT
 (3) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (4) ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER			REV.	
RJ45 Metal C3 Shielded Cable End Plug Screw 90° With RJ45 Plug						GT225525-06-XX			A0	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	X.X ± 0.5 X.XX ± 0.2	ANGLES ± 1°	mm	1/1	
						TOLERANCES		UNIT	SHEET	