

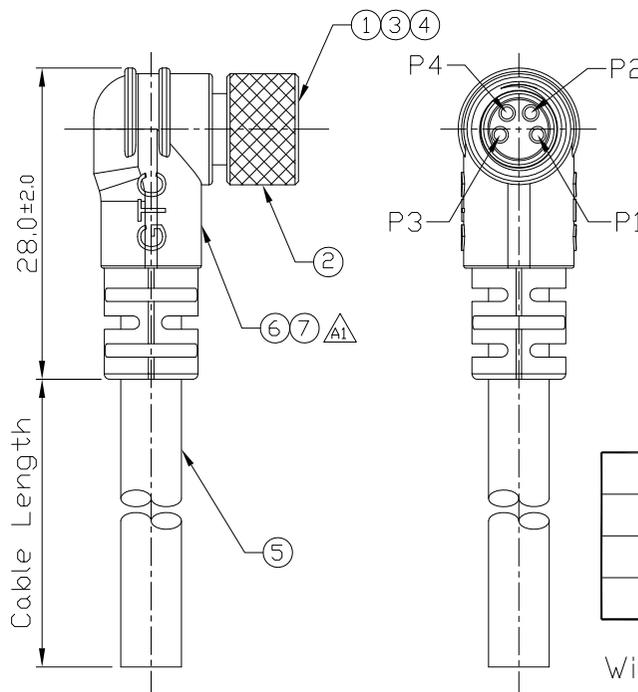



Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. Durability: 100 Cycles Min.
3. DWV: 650 Vrms.
4. Rated Voltage: 60V AC/DC.
5. Insulation Resistance: 100 MΩ Min.
6. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 05/11/11	Lucas 05/11/11	Ray 05/11/11
A1	ECN-140419	Cancel Inner Mold & Added Glue 	Joyce 05/21/14	Lucas 05/21/14	Ray 05/21/14



Wiring Diagram

Item	Part Name	Material / Finish	Q'ty
7	Over Mold	PVC Color: Black	1
6	Glue	Silicone Color: -	1
5	Cable	UL2464 22AWG*4C+Talc(UV) Color: Black, OD=5.0mm±0.2mm	1
4	O-Ring	NBR Color: Red	1
3	Contacts	Copper Alloy Finish: Au Plated	4
2	Screw Nut	Copper Alloy Finish: Ni Plated	1
1	Housing	Thermoplastic Color: Black	1

GT232125-23041-10	10000 mm	±500
GT232125-23041-09	9000 mm	±450
GT232125-23041-08	8000 mm	±400
GT232125-23041-07	7000 mm	±350
GT232125-23041-06	6000 mm	±300
GT232125-23041-05	5000 mm	±250
GT232125-23041-04	4000 mm	±200
GT232125-23041-03	3000 mm	±150
GT232125-23041-02	2000 mm	±100
GT232125-23041-01	1000 mm	±50
GT232125-23041-Z5	500 mm	±40
GT232125-23041-Z4	400 mm	±40
GT232125-23041-Z3	300 mm	±40
GT232125-23041-Z2	200 mm	±40
GT232125-23041-Z1	100 mm	±40
Part No.	Cable Length	Tol.

TITLE						DRAWING NUMBER			REV.
M8 A-Coding 3A 4P Cable End 90° Female						GT232125-23041-XX			A1
	B	1.5:1	Joyce 05/11/11	Lucas 05/11/11	Ray 05/11/11	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:  
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
 (a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
 (b) NOT TO REPRODUCE OR COPY IT  
 (c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
 (d) ALL RIGHTS RESERVED