

1

2


3

4

Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP68.
- 2. Durability: 100 Cycles Min.
- 3. DWV: 650 Vrms.
- 4. Rated Voltage: 60V AC/DC.
- 5. Insulation Resistance: 100 MΩ Min.
- 6. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Viola 12/07/17	Lucas 12/07/17	Ray 12/07/17

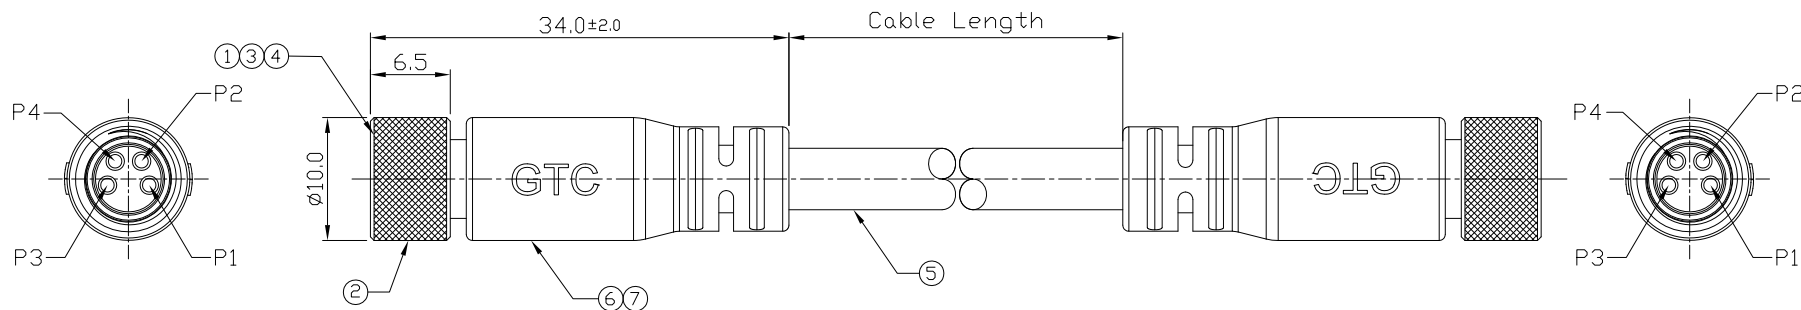

Item	Part Name	Material / Finish	Q'ty
7	Over Mold	PVC Color: Black	2
6	Inner Mold	Thermal Plastic Color: White	2
5	Cable	UL2464 22AWG*4C+Talc(UV) Color: Black, OD=5.0±0.2mm	1
4	O-Ring	NBR Color: Red	2
3	Contacts	Copper Alloy Finish: Au Plated	8
2	Screw Nut	Copper Alloy Finish: Ni Plated	2
1	Housing	Thermoplastic Color: Black	2



1	Black	1
2	Brown	2
3	Red	3
4	Orange	4

Wiring Diagram

GT2321K4-23041-10	10000 mm	+500
GT2321K4-23041-09	9000 mm	+450
GT2321K4-23041-08	8000 mm	+400
GT2321K4-23041-07	7000 mm	+150
GT2321K4-23041-06	6000 mm	+150
GT2321K4-23041-05	5000 mm	+150
GT2321K4-23041-04	4000 mm	+150
GT2321K4-23041-03	3000 mm	+100
GT2321K4-23041-02	2000 mm	+100
GT2321K4-23041-01	1000 mm	+50
GT2321K4-23041-Z5	500 mm	+50
Part No.	Cable Length	Tol.

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (b) NOT TO REPRODUCE OR COPY IT
 (c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (d) ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER			REV.
M8 A-Coding 3A 4P Cable End Female Twin-Head With Cable						GT2321K4-23041-XX			A0
	B	2:1	Viola 12/07/17	Lucas 12/07/17	Ray 12/07/17	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

1

2

3

4