


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0	ECN-141102	Modify Drawing Number GT2321L4-03041-XX -> GT2321L4-23041-XX	Joyce 01/21/15	Lucas 01/21/15	Ray 01/21/15

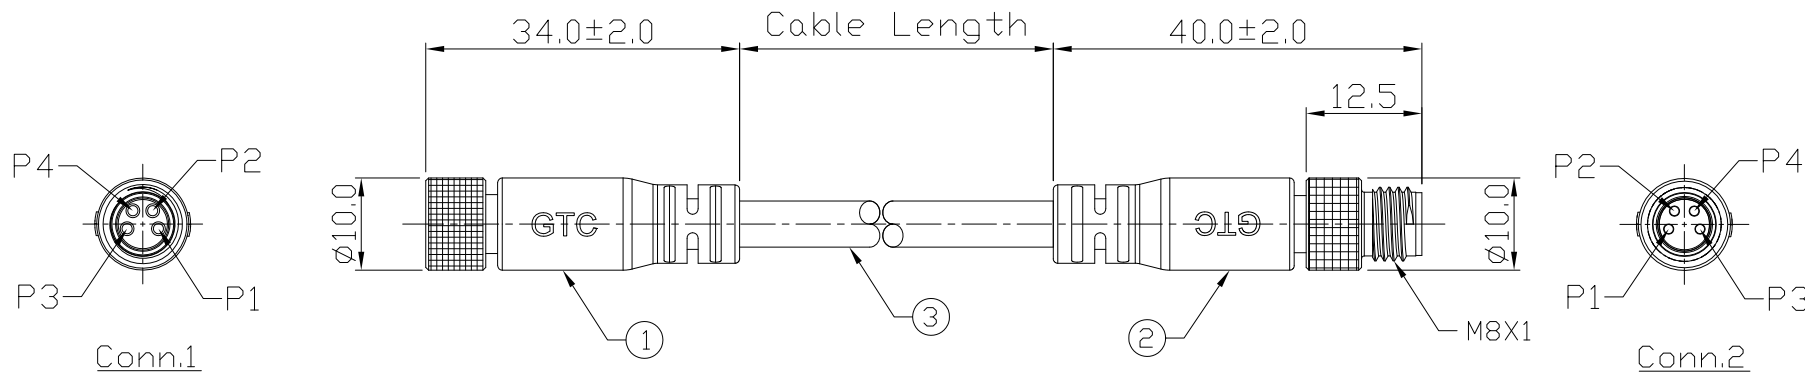

GTC
DOC.CENTER.ISSUE
JAN.22.2015
ONLY FOR
RELEASE

Item	Color	Quantity
1	Black	1
2	Brown	2
3	Red	3
4	Orange	4

Conn.1 Conn.2

Wiring Diagram

Part No.	Cable Length	Tol.
GT2321L4-23041-10	10000 mm	±500
GT2321L4-23041-09	9000 mm	±450
GT2321L4-23041-08	8000 mm	±400
GT2321L4-23041-07	7000 mm	±150
GT2321L4-23041-06	6000 mm	±150
GT2321L4-23041-05	5000 mm	±150
GT2321L4-23041-04	4000 mm	±150
GT2321L4-23041-03	3000 mm	±150
GT2321L4-23041-02	2000 mm	±100
GT2321L4-23041-01	1000 mm	±50
GT2321L4-23041-Z9	900 mm	±40
GT2321L4-23041-Z8	800 mm	±40
GT2321L4-23041-Z7	700 mm	±40
GT2321L4-23041-Z6	600 mm	±40
GT2321L4-23041-Z5	500 mm	±40
GT2321L4-23041-Z4	400 mm	±20
GT2321L4-23041-Z3	300 mm	±20

Item	Part Name	Material / Finish	Q'ty
3	Cable	UL2464 22AWG*4C+Talc(UV) Color: Black, OD=5.0mm	1
2	M8 A-Coding 3A 4P Cable End Male	GT Contact P/N: GT232134-23041-XX	1
1	M8 A-Coding 3A 4P Cable End Female	GT Contact P/N: GT232124-23041-XX	1

TITLE						DRAWING NUMBER			REV.
M8 A-Coding 3A 4P Cable End Twin-head Male / Female						GT2321L4-23041-XX			A0
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET	
	B	N/A	Joyce 02/11/14	Lucas 02/11/14	Ray 02/11/14	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm 1/1	

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
(A) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(B) NOT TO REPRODUCE OR COPY IT
(C) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(D) ALL RIGHTS RESERVED