


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. Durability: 100 Cycles Min.
3. DWV: 650 Vrms.
4. Rated Voltage: 30V AC/DC.
5. Insulation Resistance: 100 MΩ Min.
6. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Jenny 12/05/22	Lucas 12/05/22	Ray 12/05/22

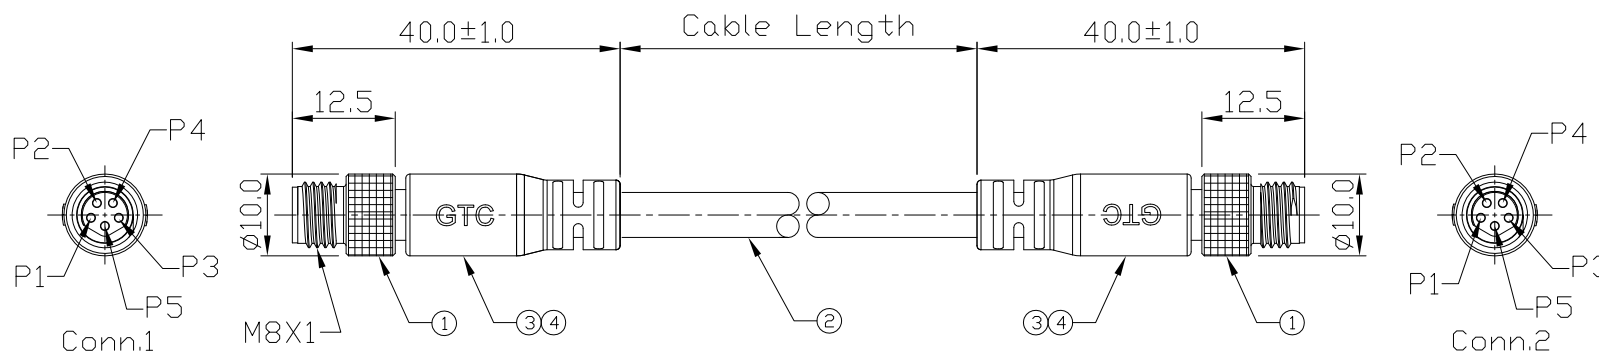

1	Black	1
2	Orange	2
3	Brown	3
4	Red	4
5	Yellow	5

Conn.1

Conn.2

Wiring Diagram

Item	Part Name	Material / Finish	Qty
4	Over Mold	PVC Color: Black	2
3	Inner Mold	Thermoplastic Color: White Or Black	2
2	Cable	UL2464 22AWG*5C+Talc (UV) OD=5.5mm, Color: Black	1
1	M8 B-Coding 3A 5P Cable End Male	GT Contact P/N: GT232234-23051-XX	2

Part No.	Cable Length	Tol.
GT2322J4-23051-10	10000 mm	+500
GT2322J4-23051-09	9000 mm	+450
GT2322J4-23051-08	8000 mm	+400
GT2322J4-23051-07	7000 mm	+150
GT2322J4-23051-06	6000 mm	+150
GT2322J4-23051-05	5000 mm	+150
GT2322J4-23051-04	4000 mm	+150
GT2322J4-23051-03	3000 mm	+100
GT2322J4-23051-02	2000 mm	+100
GT2322J4-23051-01	1000 mm	+50
GT2322J4-23051-Z9	900 mm	+50
GT2322J4-23051-Z8	800 mm	+50
GT2322J4-23051-Z7	700 mm	+50
GT2322J4-23051-Z6	600 mm	+50
GT2322J4-23051-Z5	500 mm	+50
GT2322J4-23051-Z4	400 mm	+50
GT2322J4-23051-Z3	300 mm	+25
GT2322J4-23051-Z2	200 mm	+25

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (b) NOT TO REPRODUCE OR COPY IT
 (c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (d) ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER			REV.	
Dual M8 B-Coding 3A 5P Cable						GT2322J4-23051-XX			01	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	
	B	1:1	Jenny 12/05/22	Lucas 12/05/22	Ray 12/05/22	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	