

1


2



3

4


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. Cable Diameter: 4.0 to 6.5 mm.
3. Recommend Cover Torque: 6~7 Kgf-cm.
4. Recommend Gland Nut Torque: 9~10 Kgf-cm.
5. RoHS Compliant.


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A2	ECN-190320	 Marked Modify 40.5 --> 45mm	Hank 03/25/19	Lucas 03/25/19	Ray 03/25/19

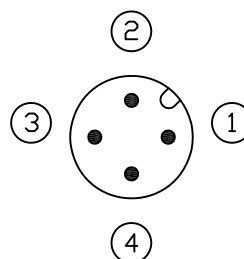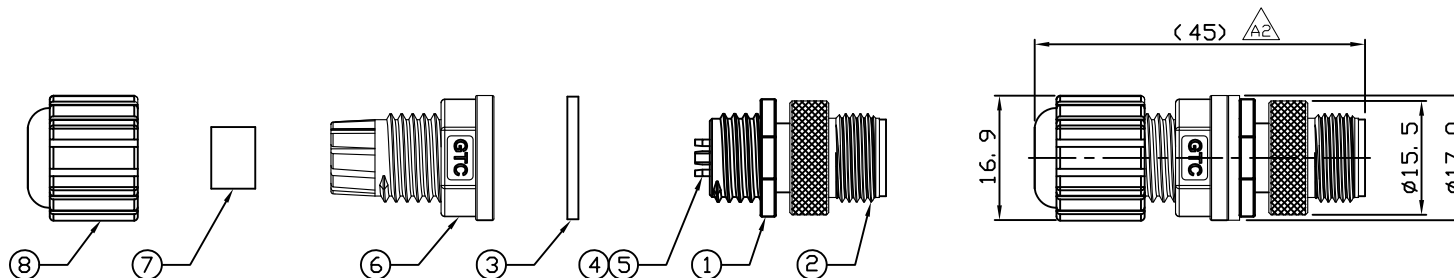

Pin Assignment



Item	Part Name	Material / Finish	Q'TY
8	Gland Nut	Thermoplastic Color: Black	1
7	Gland	NBR Color: Black	1
6	Cover	Thermoplastic Color: Black	1
5	Glue	Epoxy Color: Black	
4	Contacts	Copper Alloy Finish: Au Plated	4
3	Gasket	EPDM Color: Black	1
2	Screw Nut	Copper Alloy Finish: Ni Plated	1
1	Housing	Thermoplastic Color: Black	1

TITLE						DRAWING NUMBER			REV.
M12 A-Coding 4A 4P Field Installable Cable End Male Solder						GT234154-02040			A2
	B	1:1	Edwin 03/09/10	Ray 03/09/10	Ray 03/09/10	X, X X, XX	± 0.5 ± 0.2	X, XXX ± 0.05 ANGLES ± 1°	MM 1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

GT Contact CO., LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO., LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
 (I) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
 (II) NOT TO REPRODUCE OR COPY IT  
 (III) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
 (IV) ALL RIGHTS RESERVED

1

2

3

4