



- Notes: (Unless Otherwise Specified)
1. Waterproof Rate: IP68.
  2. Cable Diameter: 4.0 to 6.5 mm.
  3. Recommend Cover Torque: 6~7 Kgf-cm.
  4. Recommend Gland Nut Torque: 9~10 Kgf-cm.
  5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 09/03/12	Lucas 09/03/12	Roy 09/03/12

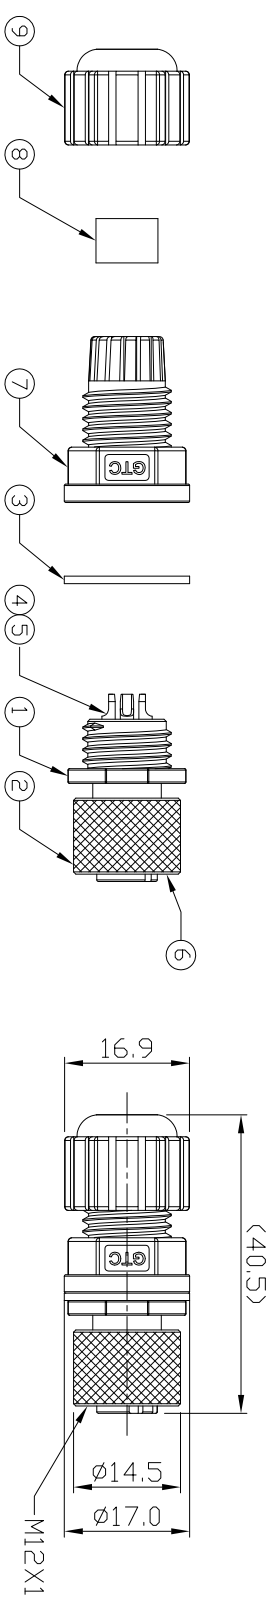

Item	Part Name	Material / Finish	Qty
9	Gland Nut	Thermoplastic Color: Black	1
8	Gland	NBR Color: Black	1
7	Cover	Thermoplastic Color: Black	1
6	O-Ring	Silicone Color: Red	1
5	Glue	Epoxy Color: Black	1
4	Contacts	Copper Alloy Finish: Au Plated	4
3	Gasket	EPDM Color: Black	1
2	Screw Nut	Copper Alloy Finish: Ni Plated	1
1	Housing	Thermoplastic Color: Black	1

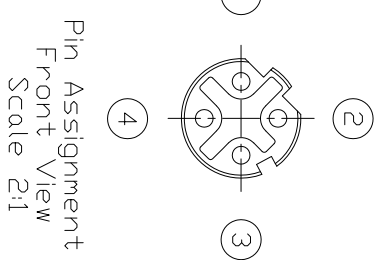

GTC  
DOC.CENTER.ISSUE  
SEP.03.2012  
ONLY FOR  
RELEASE

GT Contact CD,LTD

TITLE	DRAWING NUMBER	REV.
M12 D-Cooling 4A 4P Field Installable Cable End Female Solder	GT234444-02040	A0

DD NOT SCALE DRAWINGS	THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET	
		B	1:1	Edwin 02/17/12	Lucas 02/17/12	Roy 02/17/12	XX ± 0.5 XXX ± 0.2	XXXX ANGLES ± 1°	mm	1/1

NOTICE OF PROPRIETARY PROPERTY:  
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CD,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
b) NOT TO REPRODUCE OR PUBLISH IT IN WHOLE OR PART  
c) ALL RIGHTS RESERVED