
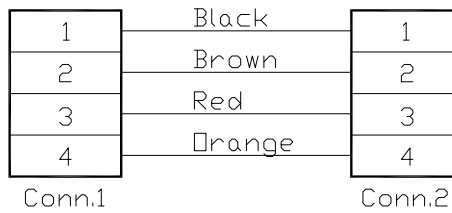


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: Unmated IP68
2. Recommend Cover Torque: 6~7 Kgf-cm.
3. Recommend Gland Nut Torque: 9~10 Kgf-cm.
4. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A1	ECN-210507	Change The Conn.2 Pin Define.	Aileen 05/13/21	Lucas 05/13/21	Ray 05/13/21

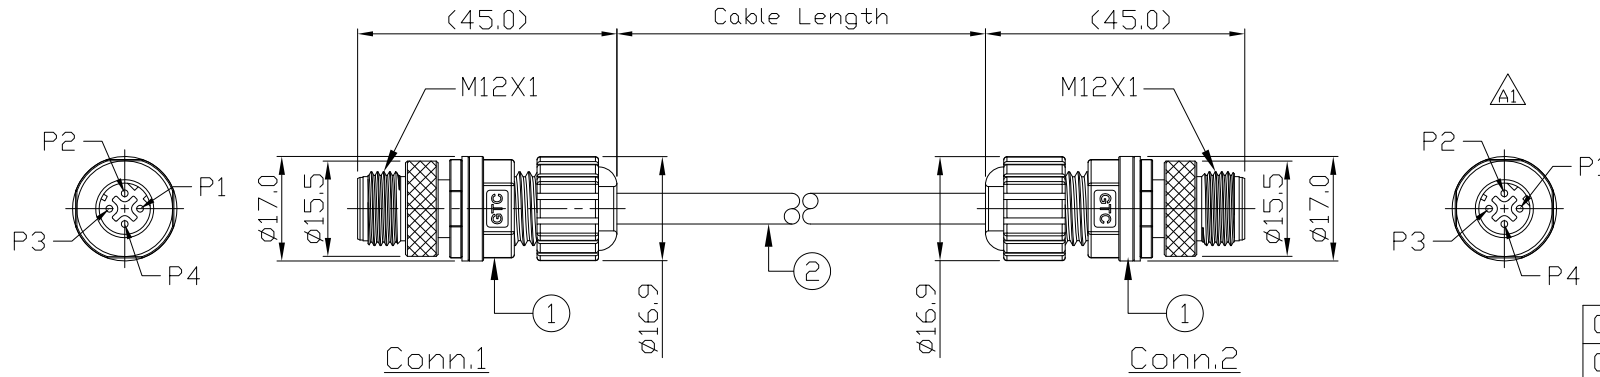

Wiring Diagram

GT2344H4-02041-06	6000 mm	+150
GT2344H4-02041-05	5000 mm	+150
GT2344H4-02041-04	4000 mm	+150
GT2344H4-02041-03	3000 mm	+100
GT2344H4-02041-02	2000 mm	+100
GT2344H4-02041-01	1000 mm	+50
GT2344H4-02041-Z9	900 mm	+50
GT2344H4-02041-Z8	800 mm	+50
GT2344H4-02041-Z7	700 mm	+50
GT2344H4-02041-Z6	600 mm	+50
GT2344H4-02041-Z5	500 mm	+50
GT2344H4-02041-Z4	400 mm	+50
GT2344H4-02041-Z3	300 mm	+25
GT2344H4-02041-Z2	200 mm	+25

Part No.	Cable Length	Tol.
----------	--------------	------

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (a) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (b) NOT TO REPRODUCE OR COPY IT
 (c) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (d) ALL RIGHTS RESERVED

2	Cable	UL2464 22AWG*4C Cable OD=5.0mm, Color: Black	1
1	M12 D-Coding 4A 4P Field Installable Cable End Male Solder	GT Contact P/N: GT234454-02040	2
Item	Part Name	Material / Finish	Q'ty

TITLE						DRAWING NUMBER			REV.
M12 D-Coding 4A 4P Field Installable Male Solder Twin-Head						GT2344H4-02041-XX			A1
	B	1:1	Aileen 03/15/21	Lucas 03/15/21	Ray 03/15/21	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET