


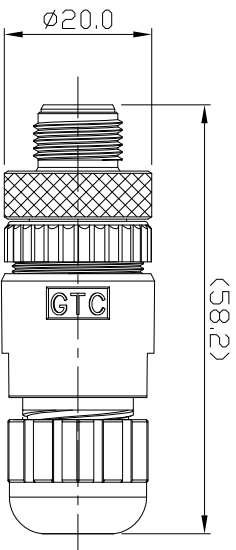


- Notes: (Unless Otherwise Specified)
1. Waterproof Rate: IP68
  2. Suitable Cable OD= 5.0mm to 8.0mm
  3. Recommend Cover Torque: 6~7 Kgf-cm.
  4. Recommend Gland Nut Torque: 10~11 Kgf-cm.
  5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Edwin 07/17/13	Lucas 07/17/13	Roy 07/17/13



Pin Assignment

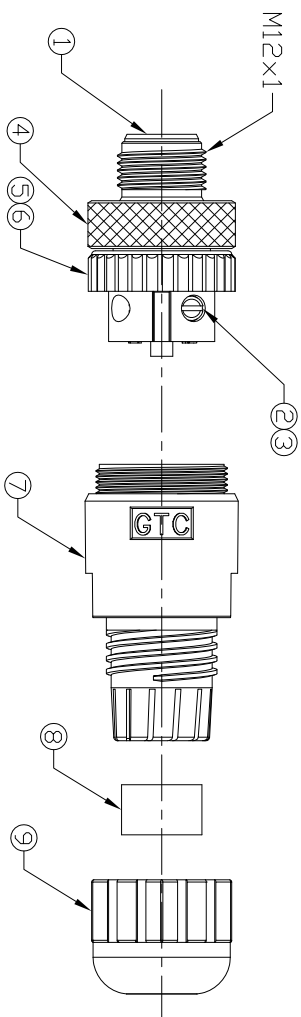

Item	Part Name	Material / Finish	QTY
9	Gland Nut	Thermoplastic Color: Black	1
8	Gland	NBR Color: Black	1
7	Cover	Thermoplastic Color: Black	1
6	D-Ring	Silicone Color: Black	1
5	Screw Nut	Thermoplastic Color: Black	1
4	Screw Nut	Copper Alloy Finish: Ni Plated	1
3	Machine Screw	Cutting Iron Finish: Ni Plated	4
2	Contacts	Copper Alloy Finish: Ni Plated	4
1	Housing	Thermoplastic Color: Black	1

Item Part Name Material / Finish QTY

TITLE Micro D-Cooling 4A 4P Field Installable Cable End Male Screw-In

DRAWING NUMBER

GT271454-31040

REV.

01

DD NOT SCALE DRAWINGS	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET
	B	1:1	Edwin 07/17/13	Lucas 07/17/13	Roy 07/17/13	XX ± 0.5 ANGLES ± 1° XXX ± 0.2	mm	1/1

1

2

3

4

GT Contact CD,LTD

NOTICE OF PROPRIETARY PROPERTY

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CD,LTD THE POSSESSOR AGREES TO THE FOLLOWING  
 01 TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
 02 NOT TO REPRODUCE OR PUBLISH IT IN WHOLE OR PART  
 03 ALL RIGHTS RESERVED

