


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP68.
2. RoHS Compliant.




REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0			Lucas 12/22/21	Lucas 12/22/21	Ray 12/22/21

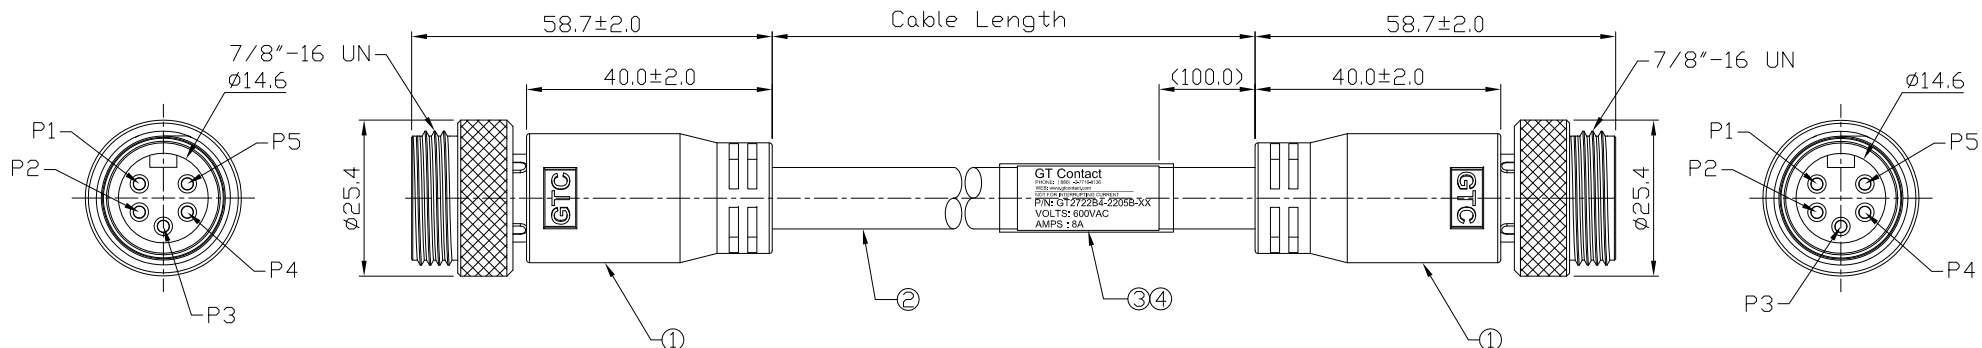

1	White	1
2	Red	2
3	Green(Ground)	3
4	Orange	4
5	Black	5

Wiring Diagram

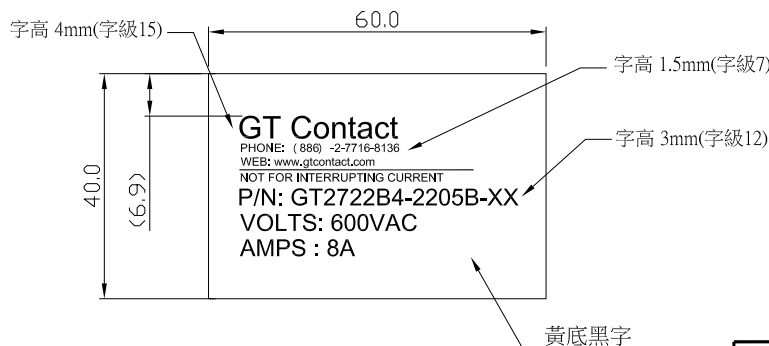

GT2722B4-2205B-10	10000 mm	+500
GT2722B4-2205B-09	9000 mm	+450
GT2722B4-2205B-08	8000 mm	+400
GT2722B4-2205B-07	7000 mm	+150
GT2722B4-2205B-06	6000 mm	+150
GT2722B4-2205B-05	5000 mm	+150
GT2722B4-2205B-04	4000 mm	+150
GT2722B4-2205B-03	3000 mm	+100
GT2722B4-2205B-02	2000 mm	+100
GT2722B4-2205B-01	1000 mm	+50
GT2722B4-2205B-Z9	900 mm	+50
GT2722B4-2205B-Z8	800 mm	+50
GT2722B4-2205B-Z7	700 mm	+50
GT2722B4-2205B-Z6	600 mm	+50
GT2722B4-2205B-Z5	500 mm	+50
GT2722B4-2205B-Z4	400 mm	+50
GT2722B4-2205B-Z3	300 mm	+25
GT2722B4-2205B-Z2	200 mm	+25

Part No.	Cable Length	Tol.
----------	--------------	------

4	Shrink Tube	L=70mm Color: Clear	1
3	Label	60*40mm Color: Yellow	1
2	Cable	ST00W PVC, 16AWG*5C OD=13.0mm, Color: Black	1
1	Mini 8A 5P Cable End Male	GT Contact GT272234-2205B-XX	2
Item	Part Name	Material / Finish	Qty

TITLE						DRAWING NUMBER			REV.	
Daul Mini 8A 5P Cable End Male With ST00W 16# Cable						GT2722B4-2205B-XX			A0	
	B	1:1	Lucas 12/22/21	Lucas 12/22/21	Ray 12/22/21	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:

(A) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE

(B) NOT TO REPRODUCE OR COPY IT

(C) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

(D) ALL RIGHTS RESERVED