


Notes: (Unless Otherwise Specified)

1. WaterProof Rate: IP68.
2. Durability: 100 Cycles Min.
3. DWV: 1400 Vrms.
4. Rated Voltage: 250V AC/DC.
5. Insulation Resistance: 100 MΩ MIN.
6. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
02	ECN-210415	Modify (1) Housing D-Coding 4P --> 5P (2) Base Removed (3) Addition Gland Pin	Hank 04/26/21	Lucas 04/26/21	Ray 04/26/21

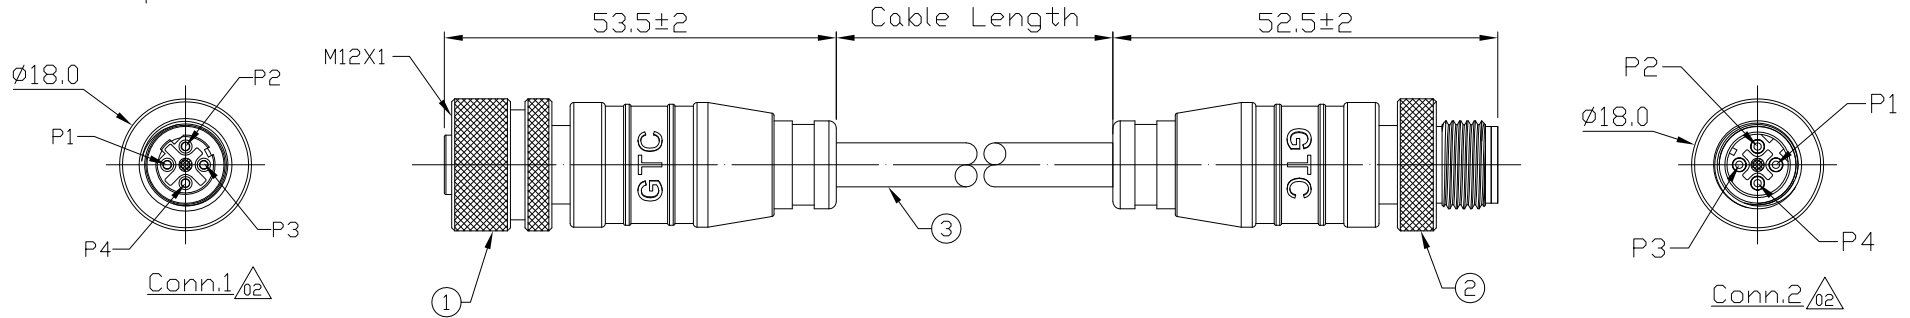

GTC
DOC.CENTER.ISSUE
JUN.02.2021
ONLY FOR
RELEASE

Conn.1		Conn.2	
1	Black	1	
2	Brown	2	
3	Red	3	
4	Orange	4	
Shell	Drain	Shell	

Wiring Diagram

GT2384M4-02041-10	10000 mm	+500
GT2384M4-02041-09	9000 mm	+450
GT2384M4-02041-08	8000 mm	+400
GT2384M4-02041-07	7000 mm	+150
GT2384M4-02041-06	6000 mm	+150
GT2384M4-02041-05	5000 mm	+150
GT2384M4-02041-04	4000 mm	+150
GT2384M4-02041-03	3000 mm	+100
GT2384M4-02041-02	2000 mm	+100
GT2384M4-02041-01	1000 mm	+50
GT2384M4-02041-Z9	900 mm	+50
GT2384M4-02041-Z8	800 mm	+50
GT2384M4-02041-Z7	700 mm	+50
GT2384M4-02041-Z6	600 mm	+50
GT2384M4-02041-Z5	500 mm	+50
GT2384M4-02041-Z4	400 mm	+50
GT2384M4-02041-Z3	300 mm	+25
GT2384M4-02041-Z2	200 mm	+25
Part No.	Cable Length	Tol.

Item	Part Name	Material / Finish	Q'ty
3	Cable	UL2464 22AWG*4C+Al/My+B+D Color: Black, OD=6.0mm	1
2	M12 D-Coding 4A 4P Male Shielded	GT Contact P/N: GT2384B4-02041-XX	1
1	M12 D-Coding 4A 4P Female Shielded	GT Contact P/N: GT2384A4-02041-XX	1

TITLE M12 D-Coding 4A 4P Shielded Cable End Without SR Twin-head Male/Female With Cable						DRAWING NUMBER GT2384M4-02041-XX		REV. 02	
THIRD ANGLE PROJECTION	SIZE B	SCALE 1:1	DRAW / DATE Whitney 08/02/19	CHECK / DATE Lucas 08/02/19	APPROVE / DATE Ray 08/02/19	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
						TOLERANCES		UNIT	SHEET

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(ii) NOT TO REPRODUCE OR COPY IT
(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(iv) ALL RIGHTS RESERVED