Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 6.0 mm.
3. Recommend Torque: 19~20 Kgf-cm.
4. Mating Cap P/N: GT1C1110X2.
5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Hank 08/05/20	Lucas 08/05/20	Ray 08/05/20

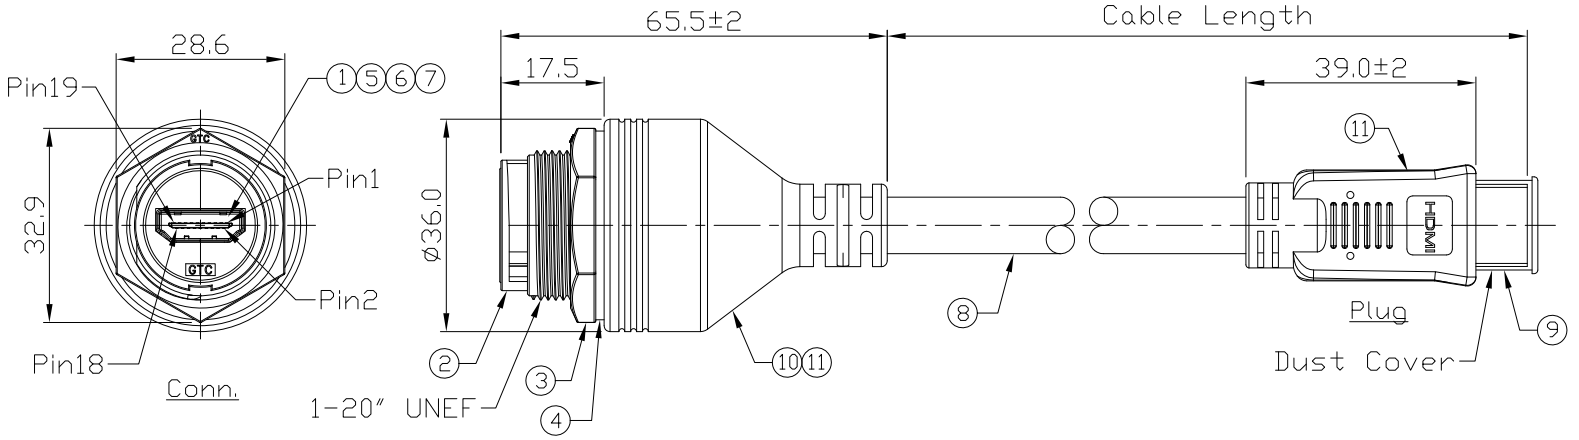

Item	Part Name	Material / Finish	Q'ty
11	Over Mold	PVC Color: Black	2
10	Inner Mold	Thermoplastic Color: White Or Black	1
9	HDMI Male	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Au Plated	1
8	Cable	UL20276[(1PR/24#+EAM)*4+(1P/24#)+(4C/24#)]+AB90% Color: Black, OD=9.6mm	1
7	Glue	Epoxy Color: Black	
6	Hold	Silicone Color: Black	1
5	PCB	FR-4 Color: Black	1
4	Gasket	Silicone Color: Black	1
3	Hex Nut	Thermoplastic Color: Black	1
2	Housing	Thermoplastic Color: Black	1
1	HDMI Female	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1

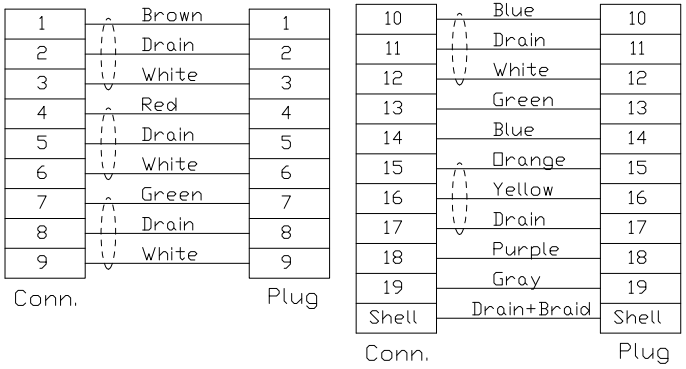

Wiring Diagram



Recommend Panel Cut-Out

GTC
DOC.CENTER.ISSUE
AUG.05.2020
ONLY FOR RELEASE

Part No.	Cable Length	Tol.
GT1H1210-02-10	10000 mm	+500
GT1H1210-02-09	9000 mm	+450
GT1H1210-02-08	8000 mm	+400
GT1H1210-02-07	7000 mm	+150
GT1H1210-02-06	6000 mm	+150

TITLE	DRAWING NUMBER	REV.
HDMI C4 Plastic Cable To Cable Female Lock With HDMI Plug	GT1H1210-02-XX	01

DO NOT SCALE DRAWINGS	B	1:1	Hank 08/05/20	Lucas 08/05/20	Ray 08/05/20	X.X ± 0.5 X.XXX ± 0.05 X.XX ± 0.2 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
(i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
(ii) NOT TO REPRODUCE OR COPY IT
(iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
(iv) ALL RIGHTS RESERVED