

1

2



3

4

Notes: (Unless Otherwise Specified)

- 1. WaterProof Rate : IP68
- 2. Durability: 100 Cycles Min.
- 3. DWV: 650 Vrms
- 4. Rated Voltage: 60V AC/DC
- 5. Insulation Resistance: 100 MΩ MIN.
- 6. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Hank 03/08/22	Lucas 03/08/22	Ray 03/08/22

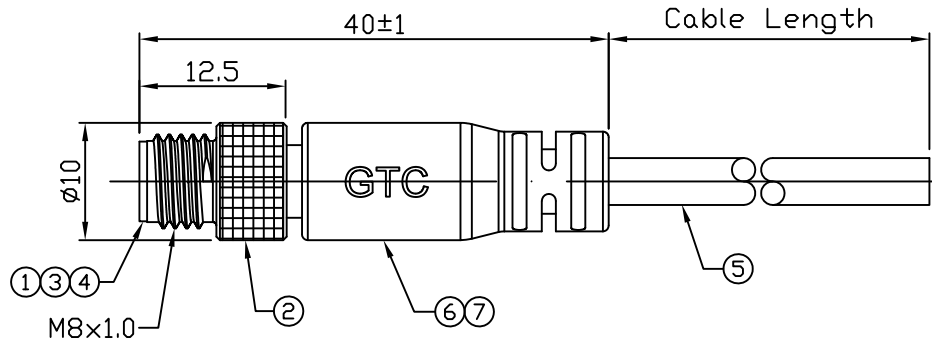

Item	Part Name	Material / Finish	Q'ty
7	Over Mold	TPU Color: Black	1
6	Inner Mold	Thermoplastic Color: White Or Black	1
5	Cable	UL20549 22AWG*4C+Al/My OD=5.0mm, Color: Black	1
4	Bush	Copper Alloy Finish: Ni Plated	1
3	Contacts	Copper Alloy Finish: Au Plated	4
2	Screw Nut	Copper Alloy Finish: Ni Plated	1
1	Housing	Thermoplastic Color: Black	1

1	Black
2	Brown
3	White
4	Blue

Wiring Diagram

GT232134-23042-10	10000mm	+500
GT232134-23042-09	9000mm	+450
GT232134-23042-08	8000mm	+400
GT232134-23042-07	7000mm	+150
GT232134-23042-06	6000mm	+150
GT232134-23042-05	5000mm	+150
GT232134-23042-04	4000mm	+150
GT232134-23042-03	3000mm	+100
GT232134-23042-02	2000mm	+100
GT232134-23042-01	1000mm	+50
GT232134-23042-Z9	900mm	+50
GT232134-23042-Z8	800mm	+50
GT232134-23042-Z7	700mm	+50
GT232134-23042-Z6	600mm	+50
GT232134-23042-Z5	500mm	+50
GT232134-23042-Z4	400mm	+50
GT232134-23042-Z3	300mm	+25
GT232134-23042-Z2	200mm	+25
GT232134-23042-Z1	100mm	+25
Part No.	Cable Length	Tol.

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (2) NOT TO REPRODUCE OR COPY IT
 (3) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (4) ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER			REV.	
M8 A-Coding 3A 4P Cable End Male With PUR Cable						GT232134-23042-XX			A0	
	B	1:1	Hank 03/08/22	Lucas 03/08/22	Ray 03/08/22	X.X ± 0.5	X.XXX ± 0.05	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

1

2

3

4